

REPORT NO. UTUCDCS-R-88-1421

UILU-ENG-88-1726

(4)


The SME User's Manual
(SME Version 2E)

by

Brian Falkenhainer

December 1988

AD-A207 042



DEPARTMENT OF COMPUTER SCIENCE
UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN · URBANA, ILLINOIS

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; Distribution unlimited		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) UIUC-DCS-88-1421			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION University of Illinois Dept. of Computer Science		6b. OFFICE SYMBOL (If applicable)		7a. NAME OF MONITORING ORGANIZATION Office of Naval Research Cognitive Science Division (Code 1142CS)	
7c. ADDRESS (City, State, and ZIP Code) 1304 W. Springfield Ave. Urbana, IL 61801			7b. ADDRESS (City, State, and ZIP Code) 800 N. Quincy St. Arlington, VA 22217-5000		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N00014-89-J-1272	
7c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO. 6115N		WORK UNIT ACCESSION NO NR 442f-007
			PROJECT NO.		TASK NO.
11. TITLE (Include Security Classification) The SME User's Manual (SME Version 2E) (Approved for public release; Distribution unlimited)					
12. PERSONAL AUTHOR(S) Brian Falkenhainer					
13a. TYPE OF REPORT Technical Report		13b. TIME COVERED FROM 89-1-1 TO 91-12-31		14. DATE OF REPORT (Year, Month, Day) 12-30-88	
15. PAGE COUNT					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Structure-mapping engine analogical processing		
05		10			
19. ABSTRACT (Continue on reverse if necessary and identify by block number)					
<p>This paper documents the <u>Structure-Mapping Engine (SME)</u>, a general-purpose program for studying analogical processing. It provides a comprehensive description of the program and instructions for using it, including techniques for integrating it into larger systems. One section demonstrates methods for configuring SME to a variety of mapping preferences and suggests the range of theoretical variations available.</p>					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Dr. James Lester			22b. TELEPHONE (Include Area Code) 202-696-4503		22c. OFFICE SYMBOL ONR 1142CS

Technical Report UIUCDCS-R-88-1421

The SME User's Manual (SME Version 2E)



Brian Falkenhainer

Qualitative Reasoning Group
Department of Computer Science
University of Illinois at Urbana-Champaign

December, 1988

✓	
Dist	
A-1	

Abstract

This paper documents the *Structure-Mapping Engine* (SME), a general-purpose program for studying analogical processing. It provides a comprehensive description of the program and instructions for using it, including techniques for integrating it into larger systems. One section demonstrates methods for configuring SME to a variety of mapping preferences and suggests the range of theoretical variations available.

This research is supported by the Office of Naval Research, Personnel and Training Research Programs, Contract No. N00014-85-K-0559.

Approved for public release; distribution unlimited.

Contents

1	Introduction	1
1.1	Conventions	1
1.2	File Organization	1
2	System Review	2
2.1	Algorithm Review	3
2.1.1	Step 1: Local match construction (create-match-hypotheses)	4
2.1.2	Step 2: Global Match Construction	8
2.1.3	Step 3: Compute Candidate Inferences (gather-inferences)	9
2.1.4	Step 4: Compute Structural Evaluation Scores (run-rules)	9
2.2	Adding Theoretical Constraints	10
3	Declarations	10
3.1	Declaring Predicates	10
3.2	Declaring Entities	11
3.3	Declaring Description Groups	11
3.4	Adding new expressions	12
3.5	Typed Logic	12
4	Using the rule system	12
4.1	Rule file syntax	13
4.1.1	File declarations	13
4.1.2	Match Constructor rules	13
4.1.3	Match Evidence rules	14
4.2	Making SME simulate structure-mapping theory	15
4.3	Making SME perform as SPROUTER	16
4.4	Relaxing the identical predicates constraint	16
4.5	Pure isomorphisms	16
4.6	Imposing externally established pairings	17
5	Representation Issues	19
6	Using SME	20
6.1	Installing SME	20
6.2	Running SME	20
6.3	Batch mode	22
6.4	Generalization mechanism	23
6.5	Inspecting MH and Gmap evidence	24
6.6	Windows	25
6.7	System parameters	25
6.8	System utilities	26
7	User Hooks	26
7.1	Applications control over display	26
7.2	Useful miscellaneous functions	27
7.2.1	Entities, predicates, and expressions	27
7.2.2	Dgroups	29

7.2.3	Creating and inspecting global matches	29
8	Algorithm Internals	30
8.1	The Match Function	30
8.2	Match Hypotheses	30
8.3	Global Mappings	30
8.4	Candidate Inference Generation	31
8.5	Rule System	31
9	Summary	32
10	Acknowledgements	32
	References	32
	Index	35

1 Introduction

The Structure-Mapping Engine (SME) is a general tool for performing various types of analogical mappings. SME was originally developed to simulate Gentner's *Structure-Mapping* theory of analogy [12,13,14]. It was hoped that the developed system would also be able to model the other types of similarity comparisons sanctioned by Gentner's theory, such as *literal similarity* and *mere appearance*. What ended up being developed was an extremely flexible and efficient system. Most theoretical assumptions are left out of the program and are supplied through match rules. Thus, while SME was originally designed to simulate the comparisons of structure-mapping theory, it may simulate many others as well. Given a set of theoretical restrictions on what constitutes a reasonable analogical mapping, one may implement these restrictions in the form of rules and use SME to interactively test their consequences. This report is intended to make that task easier.

This paper is designed for those interested in using SME for studying analogical processing, testing alternate theories, or as the mapping component in a larger system. It describes the options and user support provided in SME, how to use it for testing theories, and how to integrate it with other programs. For a discussion of the theory behind SME, the general algorithm, and descriptions of the program in operation, one should consult [8,9] prior to reading this manual. Descriptions of the use of SME in various research projects may be found in [4,5,6,7,13,15,23], while descriptions of Gentner's Structure-Mapping theory appear in [11,12,13,14,10,9].

1.1 Conventions

Throughout this guide, a few conventions will be used which should be explained at this time.

1. *CommonLisp Packages.* The SME system resides in its own package, SME, which is defined to use CommonLisp. As a result, any reference to an SME function or variable must specify the SME package, as in the function `sme:define-predicate`. To simplify the discussion, we will omit the package prefix when describing SME functions, macros, and variables. In addition, while the SME routines reside in the SME package, the structures it manipulates reside in the general USER package.
2. *The declarative interface.* In general, the routines used to present data items to SME, such as predicate definitions and concept descriptions, appear in two, functionally-equivalent forms. These two types have a naming convention associated with each. The most common type is the *declarative* or macro interface. The declarative routines do not evaluate their arguments and match the syntactic form `defroutine-name`. For example, to define the entity `sun` declaratively, one writes `(defEntity sun)`. The second type is the *functional* interface, which is present to support declarations by external programs. These routines evaluate their arguments and match the syntactic form `define-routine-name`. For example, to define the entity `sun` functionally, one writes `(define-entity 'sun)`.

1.2 File Organization

SME is contained within the following twelve files:

`config.lisp` The declarations for site specific parameters.

`defs.lisp` The basic structure definitions and macros used throughout SME.

`bits.lisp` Routines for creating and manipulating bit vectors.

bms.lisp The belief-maintenance system (BMS) - a probabilistic TMS.

bms-tre.lisp The rule system and problem-solver front end for the BMS.

sme.lisp The SME top-level routines, such as initialization, defining facts about a concept, and fetching and storing facts and concept descriptions.

match.lisp The SME mapping algorithm.

match-rules-support.lisp A few functions useful for writing SME match rules.

display.lisp Machine independent output routines.

windowing.lisp Symbolics dependent interface routines.

batch.lisp Routines to enable execution in *batch* mode with a final report generated.

generalize.lisp Inductive generalization support.

2 System Review

The Structure-Mapping Engine can simulate a class of *structural approaches* to analogical mapping. In these approaches, there is a distinct stage of matching and carryover of predicates from one domain (the *base*) into another (the *target*) within the larger analogy process. Furthermore, although there are a number of differences, there is widespread agreement among these techniques on one fundamental restriction [1,2,16,19,20,21,22,25]:

1. *Structural consistency*. If a final analogical mapping includes a predicate in the base paired with a predicate in the target, then it must also include corresponding pairings between each of their arguments. This criterion simply asserts that an analogical mapping must not produce syntactically meaningless predicate calculus forms.

In SME, this restriction was enforced by the requirement of simulating Structure-Mapping theory; its impact on the algorithm is described in [9]. However, this restriction is only part of that theory and alone does not uniquely define a matching algorithm. Additional theoretical restrictions must be supplied through *match rules*. This enables SME to be used in exploring the space of theories consistent with this single criterion. An additional restriction is enforced by default:

- *One-to-one mapping*: No base item (predicate or object) may be paired with multiple target items. Likewise, no target item may be paired with multiple base items.

Enforcement of the one-to-one restriction is a global parameter which may be disabled. Support is provided to implement variations of one-to-one within the match rules.

Match rules specify what pairwise matches are possible and provide local measures of evidence used in computing the evaluation score. These rules are the key to SME's flexibility. To build a new matcher one simply loads a new set of match rules. This has several important advantages. First, we can simulate all of the types of comparisons sanctioned by Structure-Mapping theory with one program. Second, the rules could in theory be "tuned" if needed to simulate particular kinds of human performance. Third, a variety of other analogical mapping systems may be simulated for comparison and theoretical investigation. The breadth of the space of these structural approaches is suggested by the examples in Section 4.

In this section, the SME matching algorithm is briefly reviewed, followed by a short discussion of how theoretical guidelines may be added to the general mechanism. It is a summary of the algorithm description appearing in [9], annotated with the SME functions that carry out each step.

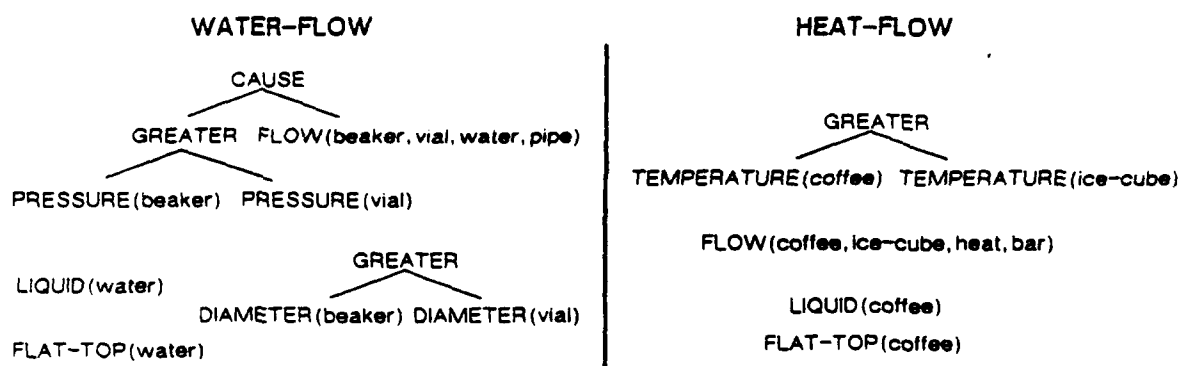


Figure 1: Simplified water flow and heat flow descriptions.

2.1 Algorithm Review

Given descriptions of a base and a target (called Dgroups), SME builds all structurally consistent interpretations of the comparison between them. Each interpretation of the match is called a *global mapping*, or *Gmap*. Gmaps consist of three parts:

1. *Correspondences*: A set of pairwise matches between the expressions and entities of the two dgroups.
2. *Candidate Inferences*: A set of new expressions which the comparison suggests holds in the target dgroup.
3. *Structural Evaluation Score*: (Called *SES* for brevity) A numerical estimate of match quality.

For example, given the descriptions of water flow and heat flow shown in Figure 1, SME might, depending on the current theoretical configuration, offer several alternative interpretations for this potential analogy. In one interpretation, the central inference is that water flowing from the beaker to the vial corresponds to heat flowing from the coffee to the ice cube. Alternatively, one could map water to coffee, since they are both liquids.

The SME algorithm (see Figure 2) is logically divided into four stages:

1. *Local match construction*: Finds all pairs of (*BaseItem*, *TargetItem*) that potentially can match. A *Match Hypothesis* is created for each such pair to represent the possibility that this local match is part of a global match.
2. *Gmap construction*: Combines the local matches into maximal consistent collections of correspondences.
3. *Candidate inference construction*: Derives the inferences suggested by each Gmap.
4. *Match Evaluation*: Attaches evidence to each local match and uses this evidence to compute structural evaluation scores for each Gmap.

-
- Run MHC rules to construct match hypotheses (create-match-hypotheses).
 - Calculate the *Conflicting* set for each match hypothesis (calculate-nogoods).
 - Calculate the *EMaps* and *NoGood* sets for each match hypothesis by upward propagation from entity mappings (generate-justifications and propagate-descendants).
 - During the propagation, delete any match hypotheses that have justification holes (propagate-death).
 - Merge match hypotheses into Gmaps (generate-gmaps).
 1. Interconnected and consistent (generate-structure-groups).
 2. Consistent members of same base structure (merge-base).
 3. Any further consistent combinations (full-gmap-merge).
 - Calculate the candidate inferences for each GMap (gather-inferences).
 - Score the matches (run-rules).
 1. Local match scores.
 2. Global structural evaluation scores.

Figure 2: Summary of SME algorithm.

Each computation will now be reviewed, using a simple example to illustrate their operation. In this example, the rules of structure-mapping theory are in use. It is important to distinguish the general SME system from its behavior when using the rules of a particular theory. Hence, when using the rules of structure-mapping theory, it will be called SME_{SMT}.

2.1.1 Step 1: Local match construction (create-match-hypotheses)

SME begins by finding for each entity and predicate in the base the set of entities or predicates in the target that could plausibly match that item (see Figure 3). Plausibility is determined by *match constructor* rules, which are of the form:

```
(MHCrule (<Trigger> <BaseVariable> <TargetVariable>
          [:test <TestForm>])
  <Body>)
```

The body of these rules is run on each pair of items (one from the base and one from the target) that satisfy the condition and installs a *match hypothesis* which represents the possibility of them matching. For example, to state that an expression in the base may match an expression in the target whose functor is identical, we write:

```
(MHC-rule (:filter ?b ?t :test (equal (expression-functor ?b)
                                       (expression-functor ?t)))
  (install-MH ?b ?t))
```

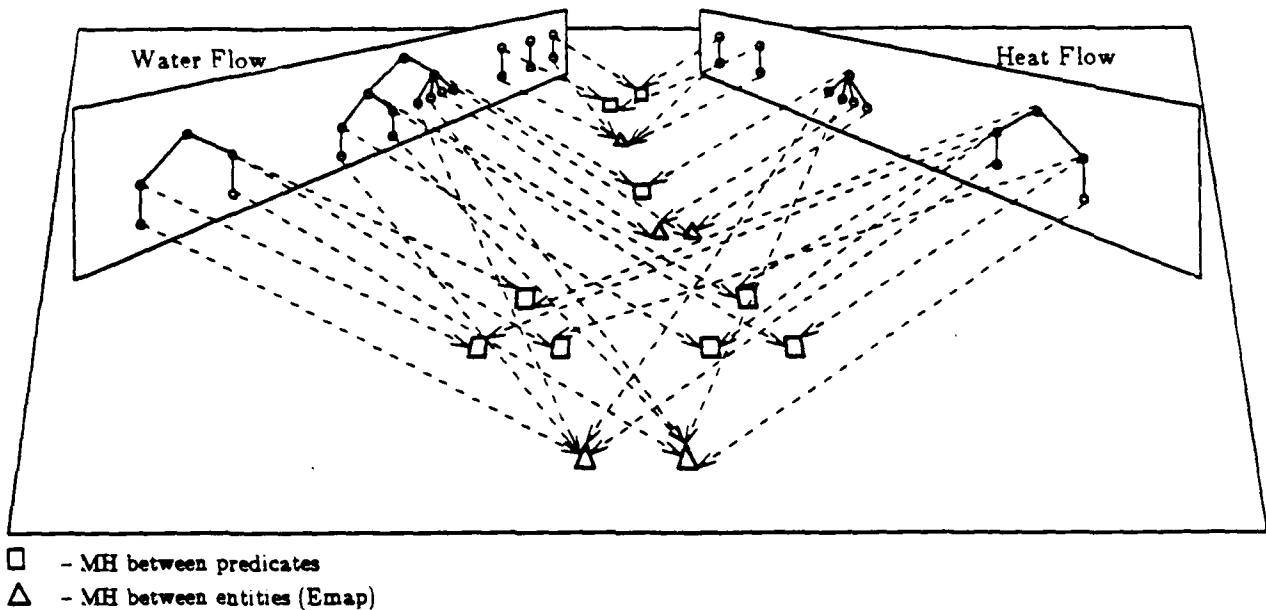


Figure 3: Local Match Construction. The water flow and heat flow descriptions of Figure 1 have been drawn in the abstract and placed to the left and right, respectively. The objects in the middle depict match hypotheses.

The likelihood of each match hypothesis is found by running *match evidence* rules and combining their results. The evidence rules provide support for a match hypothesis by examining the structural and syntactic properties of the items matched. For example, the rule

```
(MHERule ((:intern (MH ?b ?t) :test (and (expression? ?b) (expression? ?t)
                                          (eq (expression-functor ?b)
                                              (expression-functor ?t))))))
(assert! (implies same-functor (MH ?b ?t) (0.5 . 0.0))))
```

states "If the two items are expressions and their functors are the same, then supply 0.5 evidence in favor of the match hypothesis." The rules may also examine match hypotheses associated with the arguments of these items to provide support based on systematicity. This causes evidence for a match hypothesis to increase with the amount of higher-order structure supporting it.

The state of the match between the water flow and heat flow descriptions of Figure 1 after running these first two sets of rules is shown in Figure 4. There are several important things to notice in this figure. First, there can be more than one match hypothesis involving any particular base or target item. Second, our rules required predicates to match identically while they allowed entities to match on the basis of their roles in the predicate structure. Thus while TEMPERATURE can match either PRESSURE or DIAMETER, IMPLIES cannot match anything but IMPLIES. Third, not every possible correspondence is created. Local matches between entities are only created when justified by some other identity. This significantly constrains the number of possible matches in the typical case.

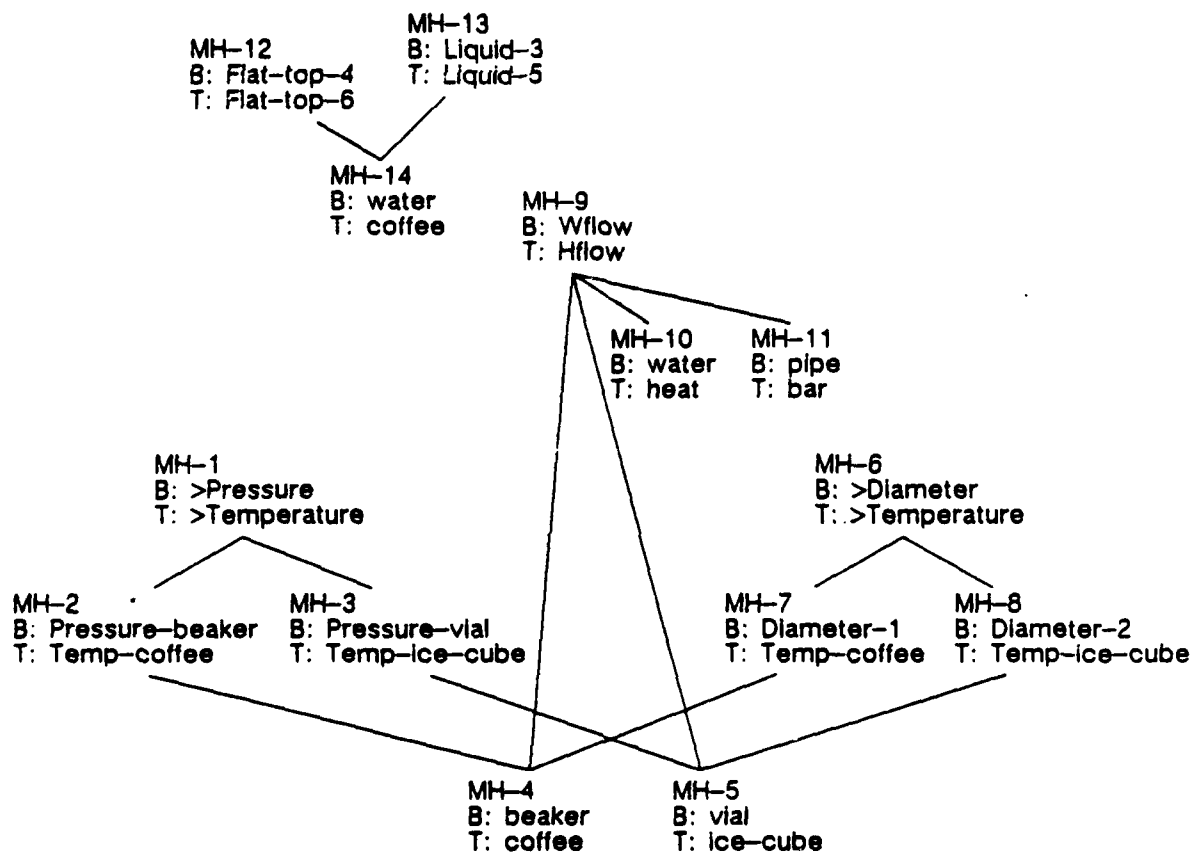


Figure 4: Water Flow / Heat Flow Analogy After Local Match Construction. Here we show the graph of match hypotheses depicted schematically in Figure 3, augmented by links indicating expression-to-arguments relationships. Match hypotheses which are not descended from others are called *roots* (e.g., the matches between the GREATER predicates, MH-1 and MH-6, and the match for the predicate FLOW, MH-9). Match hypotheses between entities are called *Emaps* (e.g., the match between beaker and coffee, MH-4). Emaps play an important role in algorithms based on structural consistency.

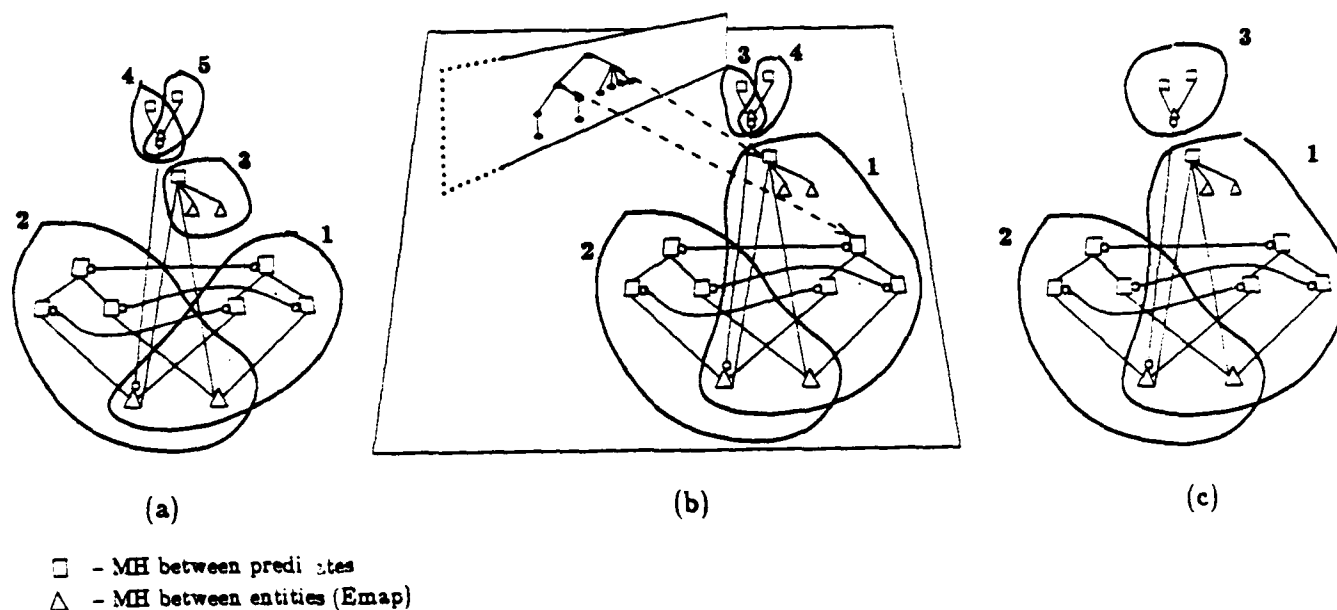


Figure 5: Water Flow - Heat Flow analogy after computation of *Conflicting* relationships. Simple lines show the tree-like graph that the grounding criteria imposes upon match hypotheses. Lines with circular endpoints indicate the *Conflicting* relationships between matches. Some of the original lines from MH construction have been left in to show the source of a few *Conflicting* relations.

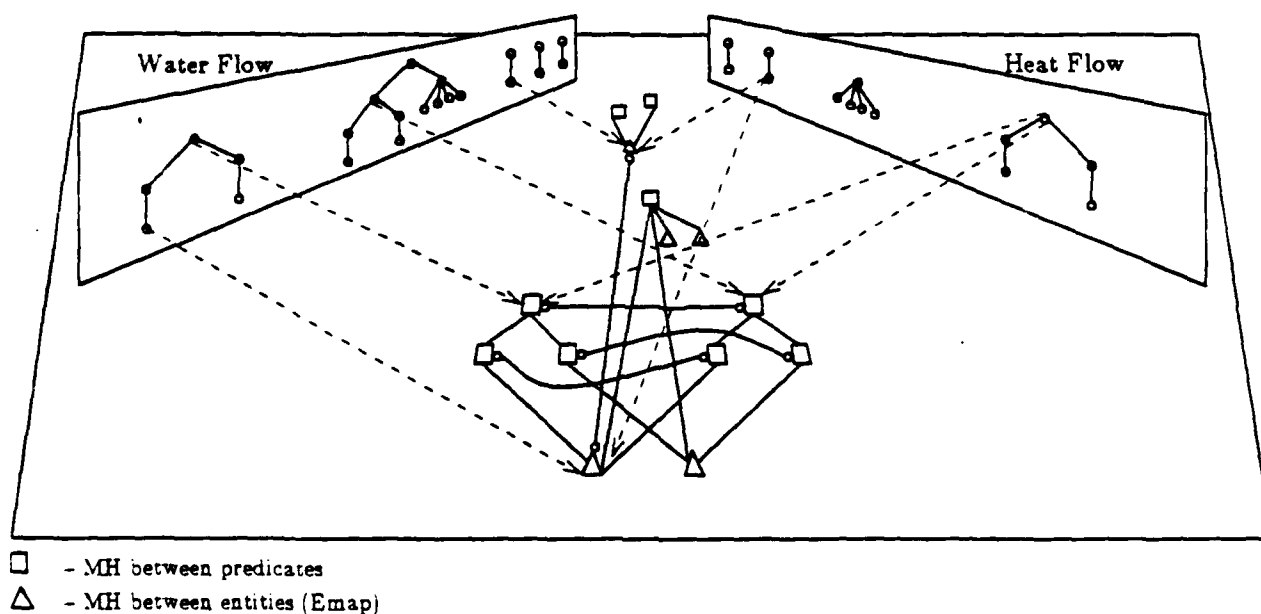


Figure 6: GMap Construction. (a) Merge step 1: Interconnected and consistent. (b) Merge step 2: Consistent members of the same base structure. (c) Merge step 3: Any further consistent combinations.

2.1.2 Step 2: Global Match Construction

The second step in the SME algorithm combines local match hypotheses into collections of global matches (Gmaps). Intuitively, each global match is the largest possible set of match hypotheses that depend on the same one to one object correspondences.

More formally, Gmaps consist of *maximal, structurally consistent* collections of match hypotheses. A collection of match hypotheses is structurally consistent if it satisfies two criteria:

1. *One-to-one*: No two match hypotheses assign the same base item to multiple target items or any target item to multiple base items.
2. *Support*: If a match hypothesis MH is in the collection, then so are the match hypotheses which pair up all of the arguments of MH's base and target items.

The preservation criteria enforces strict one to one mappings. The grounding criteria preserves connected predicate structure. A collection is maximal if adding any additional match hypothesis would render the collection structurally inconsistent.

The formation of global matches is composed of two primary stages:

1. *Compute consistency relationships (calculate-nogoods)*: Here we generate for each match hypothesis the sets of entity mappings it entails, what match hypotheses it locally conflicts with, and which match hypotheses it is structurally inconsistent with. This information simplifies the detection of contradictory sets of match hypotheses, a critical operation in the rest of the algorithm. The result of this stage of processing appears in Figure 5.
2. *Merge match hypotheses (generate-gmaps)*: Compute Gmaps by successively combining match hypotheses as follows:
 - (a) *Form initial combinations (generate-structure-groups)*: Combine interconnected and consistent match hypotheses into an initial set of Gmaps (Figure 6a).
 - (b) *Combine dependent Gmaps (merge-base)*: Since base and target dgroups are rarely isomorphic, some Gmaps in the initial set will overlap in ways that allow them to be merged. The advantage in merging them is that the new combination may provide structural support for candidate inferences (Figure 6b).
 - (c) *Combine independent collections (full-gmap-merge)*¹ The results of the previous step are next combined to form maximal consistent collections (Figure 6c).

A parameter option allows the support criterion to be weakened so that it does not cross the boundaries of a *relational group* [7]. A relational group is distinguished as an unordered collection of relational structures that may be collectively referred to as a unit. They correspond to the abstract notion of a "set" and are associated to predicates taking any number of arguments. For example, a set of relations joined by the predicate AND defines a relational group. Other examples include the axioms of a theory, a decomposable compound object, or the relations holding over an interval of time. Intuitively, we would like to say that two groups correspond without requiring that their contents are exhaustively mapped.

If base and target propositions each contain a group as an argument, the propositions should not be prevented from matching if the groups' members cannot be exhaustively paired. For example, the set of relations

¹These two merge steps (b and c) are called by *merge-gmaps*, which is in turn called by *generate-gmaps*.

B: $\text{Implies}[\text{And}(P_1, P_2, P_3), P_4]$ (1)
 T: $\text{Implies}[\text{And}(P'_1, P'_2), P'_4]$

should match better than the set of relations

B: $\text{Implies}[\text{And}(P_1, P_2, P_3), P_4]$ (2)
 T': P'_1, P'_2, P'_4

The original model of structural consistency would score (1) and (2) equally, since the *Implies* relations of (1) would not be allowed to match. This is a particularly important consideration when matching sequential, state-based descriptions (e.g., the behavior of a system through time). The set of relations describing a pair of states often do not exhaustively match or are of different cardinality. Yet, higher-order relations over states, such as temporal orderings, are vital and must appear in the mapping.

2.1.3 Step 3: Compute Candidate Inferences (gather-inferences)

Associated with each Gmap is a (possibly empty) set of candidate inferences. Candidate inferences are base predicates that would fill in structure which is not in the Gmap (and hence not already in the target). If a candidate inference contains a base entity that has no corresponding target entity (i.e., the base entity is not part of any match hypothesis for that gmap), SME introduces a new, hypothetical entity into the target. Such entities are represented as a skolem function of the original base entity (i.e., (:skolem base-entity)).

In Figure 7, Gmap #1 has the top level CAUSE predicate as its sole candidate inference. In other words, this Gmap suggests that the cause of the flow in the heat dgroup is the difference in temperatures. If the FLOW predicate was not present in the target, then the candidate inferences for a Gmap corresponding to the pressure inequality would be both CAUSE and FLOW. Note that GREATER-THAN[DIAMETER(coffee), DIAMETER(ice cube)] is not a valid candidate inference for the first Gmap because it does not intersect the existing Gmap structure.

2.1.4 Step 4: Compute Structural Evaluation Scores (run-rules)

Typically a particular pair of base and target will give rise to several Gmaps, each representing a different interpretation of the match. Often it is desired to select only a single Gmap, for example to represent the best interpretation of an analogy. Many of these evaluation criteria (including validity, usefulness, and so forth) lie outside the province of Structure-Mapping, and rely heavily on the domain and application. However, one important component of evaluation is *structural* — for example, one Gmap may be considered a better analogy than another if it embodies a more systematic match. SME provides a programmable mechanism for computing a *structural evaluation score* (SES) for each Gmap. This score can be used to rank-order the Gmaps in selecting the "best" analogy, or as a factor in a more complex (but external) evaluation procedure. In SME_{SMR}, the structural evaluation score is currently computed by simply adding the belief of each local match hypothesis to the belief of the Gmaps it is a member of.

Returning to Figure 7, note that the "strongest" interpretation (i.e., the one which has the highest structural evaluation score) is the one we would intuitively expect. In other words, beaker maps to coffee, vial maps to ice-cube, water maps to heat, pipe maps to bar, and PRESSURE maps to TEMPERATURE. Furthermore, we have the candidate inference that the temperature difference is what causes the flow.

```

Rule File: literal-similarity.rules      Number of Match Hypotheses: 14

Gmap #1: { (>PRESSURE >TEMPERATURE) (PRESSURE-BEAKER TEMP-COFFEE)
            (PRESSURE-VIAL TEMP-ICE-CUBE) (WFLOW HFLOW) }
  Emaps: { (beaker coffee) (vial ice-cube) (water heat) (pipe bar) }
  Weight: 5.99
  Candidate Inferences: (CAUSE >TEMPERATURE HFLOW)

Gmap #2: { (>DIAMETER >TEMPERATURE) (DIAMETER-1 TEMP-COFFEE)
            (DIAMETER-2 TEMP-ICE-CUBE) }
  Emaps: { (beaker coffee) (vial ice-cube) }
  Weight: 3.94
  Candidate Inferences: { }

Gmap #3: { (LIQUID-3 LIQUID-5) (FLAT-TOP-4 FLAT-TOP-6) }
  Emaps: { (water coffee) }
  Weight: 2.44
  Candidate Inferences: { }

```

Figure 7: Complete SME interpretation of Water Flow - Heat Flow Analogy.

2.2 Adding Theoretical Constraints

Given the general program, we may then add theoretical constraints in the form of rules. For instance, the example just presented used the *literal similarity* rules of structure-mapping theory. These rules augment SME's one-to-one mapping and structural consistency criteria with two additional restrictions. First, evidence is computed according to *systematicity*, that is, highly interconnected systems of relations are preferred over independent facts. Second, only identical relations are allowed to match (i.e., CAUSE is not allowed to match GREATER-THAN). Had another set of rules been used, the results might have been substantially different. For example, the *mere appearance* rules of structure-mapping theory would have determined that the water to coffee mapping was the best, due to their superficial similarity.

3 Declarations

The descriptions given to SME are constructed from a user-defined vocabulary of entities and predicates. This section discusses the conventions for defining languages for SME's use.

3.1 Declaring Predicates

```

defPredicate name argument-declarations predicate-class           [Macro]
    &key :expression-type logical-type
        :commutative? {t | nil}
        :n-ary? {t | nil}
        :documentation descriptive-string
        :eval procedural-attachment )

define-predicate name argument-declarations predicate-class ... [Function]

```

predicate-class is either function, attribute, or relation, according to what kind of predicate *name* is. The *argument-declarations* allows the arguments to be named and typed. For example, the declaration:

```
(defPredicate CAUSE ((antecedent event) (consequent event)) relation)
```

states that CAUSE is a two-place relational predicate. Its arguments are called antecedent and consequent, both of type event. The names and types of arguments are for the convenience of the representation builder and any external routines (including the match rules), and are not currently used by SME internally. Likewise, the predicate class may be very important to the theoretical constraints imposed in the rules, but is ignored by SME internally.

The optional declaration *:expression-type* indicates the logical type of an expression headed by the given predicate. For example, the predicate throw may represent a kind of action, while the predicate mass may represent an extensive-quantity.

The optional declarations *:commutative?* and *:n-ary?* provide SME with important syntactic information. *:commutative?* indicates that the predicate is commutative, and thus the order of arguments is unimportant when matching. *:n-ary?* indicates that the predicate can take any number of arguments. Examples of commutative nary predicates include AND, SUM, and SET.

The *:documentation* option allows one to attach a descriptive string to a predicate. This documentation may then be accessed through the lisp machine supplied interface (C-Shift-D) or some externally written routine. If no documentation is supplied, the list of argument names is used. Another option provided strictly for potential user routines is the optional *:eval* parameter. This allows one to declare a procedural attachment for a predicate.

3.2 Declaring Entities

```
defEntity name &key type constant?
```

[Macro]

```
define-Entity name &key type constant?
```

[Function]

Entities are logical individuals, i.e., the objects and constants of a domain. Typical entities include physical objects, their temperature, and the substance they are made of. Primitive entities are declared with the *defEntity* form (a non-primitive entity would be (temperature sun), which is a functional form representing a particular numeric temperature entity). Primitive entities declared in this way represent global entity types, that is, they represent a class of entities rather than an actual instance of an entity. When an entity type is actually used in a domain description, a unique entity instance is created for that type (e.g., Mary is translated to Mary43).

Since the language is typed, each entity type can be declared as a subtype of an existing type using the *:type* option. For example, we might have

```
(defEntity star :type inanimate)
(defEntity Sun :type star)
```

to say that stars are inanimate objects, and our Sun is a particular star. Constants are declared by using the *:constant?* option, as in

```
(defEntity zero :type number :constant? t)
```

3.3 Declaring Description Groups

```
defDescription description-name
  entities (entity1, entity2, ..., entityi)
  expressions (expression-declarations)
```

[Macro]

`define-description description-name entities expressions` [Function]

For simplicity, predicate instances and compound terms are called *expressions*. A *Description Group*, or *Dgroup*, is a collection of primitive entities and expressions concerning them. Dgroups are defined with the `defDescription` form, where *expression-declarations* take the form

expression or
 (*expression* :name *expression-name*)

For example, the description of water flow depicted in Figure 1 was given to SME as

```
(defDescription simple-water-flow
  entities (water beaker vial pipe)
  expressions (((flow beaker vial water pipe) :name wflow)
               ((pressure beaker) :name pressure-beaker)
               ((pressure vial) :name pressure-vial)
               ((greater pressure-beaker pressure-vial) :name >pressure)
               ((greater (diameter beaker) (diameter vial)) :name >diameter)
               ((cause >pressure wflow) :name cause-flow)
               (flat-top water)
               (liquid water)))
```

All entities must have been previously defined and every entity referred to in the Dgroup's expressions must appear in the entities list of the `defDescription`.

3.4 Adding new expressions

`expression form dgroup-name &key expression-name update-structure?` [Function]

Expressions are normally defined as a side effect of creating a description group (Dgroup). However, the facility is provided for dynamically adding new expressions to a Dgroup. The syntax is essentially the same as for expressions declared within a `defDescription`. The expression's *form* may refer to the names of existing Dgroup expressions and the form may be given a name. When `expression` is used to add expressions to an existing Dgroup, the `update-structure?` keyword must be invoked with a non-nil (e.g., T) value. This keyword indicates that the Dgroup's structure must be reexamined, since the known structural roots will change as a result of this new expression.

3.5 Typed Logic

A mechanism exists for attaching types to predicates and their arguments (see `defPredicate`). This facility is designed to constrain the operation of SME, particularly candidate inference generation. However, it has not been extensively used to date. The ability to attach types may be useful for consistency checking by external systems.

4 Using the rule system

The rule system is the heart of SME's flexibility. It allows one to specify what types of things might match and how strongly these matches should be believed. This section describes the required syntax for a rule set and different strategies for rule specification.

4.1 Rule file syntax

A rule set, or rule file, consists of a *declaration*, a set of *match constructor* rules, and a set of *match evidence* rules. In order to describe each, we will examine the syntax and functionality of each part of the *smt-analogy* rule file.

4.1.1 File declarations

sme-rules-file *identification-string* [Function]

Each rule file must begin with the initialization command **sme-rules-file**. This function clears the rule system in preparation for a new set of rules (rules are cached for efficiency) and stores the name of the rule set for output identification purposes. For example, our sample rules file begins with:²

```
(sme-rules-file "smt-analogy.rules")
```

The rule file must then end with the **tre-save-rules** command:

tre-save-rules [Function]

4.1.2 Match Constructor rules

MHC-rule (*trigger* *?base-variable* *?target-variable* [Macro]
[:test *test-form*])

body

install-MH *base-item* *target-item* [Function]

SME begins by finding for each entity and predicate in the base the set of entities or predicates in the target that could plausibly match that item. Plausibility is determined by *match constructor* rules, which are responsible for installing all match hypotheses processed by SME. There are two types of constructor rules, each indicated by a different value for *trigger*. The first type of rule is indicated by a *:filter* trigger. These rules are applied to each pair of base and target expressions, executing the code in *body*. If the *:test* option is used, *test-form* must return true for the body to be run. For example, the following rule states that an expression in the base may match an expression in the target whose functor is identical, unless they are attributes (a structure-mapping *analogy* criterion):

```
(MHC-rule (:filter ?b ?t :test (and (eq (expression-functor ?b)
                                         (expression-functor ?t))
                                     (not (attribute? (expression-functor ?b)))))
  (install-MH ?b ?t))
```

The second type of MHC rule is indicated by a trigger of *:intern*. These rules are run on each match hypothesis as it is created. Typically they create match hypotheses between any functions or entities that are the arguments of the expressions joined by the match hypothesis that triggered the rule. The following is one of two that appear in *smt-analogy.rules*:

²Notice the file extension **.rules*. While rule files are not required to end in *".rules"*, all user interface facilities for simplifying the loading of rule files depend upon this extension. Another useful point is that rule files are typically defined to be in the SME package to avoid having to use *sme:* throughout the rule set.

```
(MHC-rule (:intern ?b ?t :test (and (expression? ?b) (expression? ?t)
                                     (not (commutative? (expression-functor ?b)))
                                     (not (commutative? (expression-functor ?t)))))
  (do ((bchildren (expression-arguments ?b) (cdr bchildren))
      (tchildren (expression-arguments ?t) (cdr tchildren)))
    ((or (null bchildren) (null tchildren)))
    (cond ((and (entity? (first bchildren)) (entity? (first tchildren)))
      (install-MH (first bchildren) (first tchildren)))
      ((and (function? (expression-functor (first bchildren)))
        (function? (expression-functor (first tchildren))))
      (install-MH (first bchildren) (first tchildren)))
      ((and (attribute? (expression-functor (first bchildren)))
        (eq (expression-functor (first bchildren))
            (expression-functor (first tchildren))))
      (install-MH (first bchildren) (first tchildren))))))
```

Notice that the third test allows identical attributes to match, whereas the previous MHC rule did not allow such matches. This design does not allow isolated attributes to match, but recognizes that attributes appearing in a larger overall structure should be matched.

4.1.3 Match Evidence rules

rule <i>nested-triggers body</i>	[Macro]
rassert! <i>expression &optional (belief+ 1.0) (belief- 0.0)</i>	[Macro]
assert! <i>expression &optional (belief+ 1.0) (belief- 0.0)</i>	[Function]
initial-assertion <i>assertion-form</i>	[Macro]

The structural evaluation score is computed in two phases. First, each match hypothesis is assigned some local degree of evidence, independently of what Gmaps it belongs to. Second, the score for each Gmap is computed based on the evidence for its match hypotheses. The management of evidence rules is performed by the *Belief Maintenance System* (BMS) [3]. A BMS is a form of Truth-Maintenance system, extended to handle numerical weights for evidence and degree of belief (see [3] for a description of what the weights mean). Pattern-directed rules are provided that trigger on certain events in the knowledge base.

The following is a simple rule for giving evidence to match hypotheses between expressions that have the same predicate:

```
(initial-assertion (assert! 'same-functor))

(rule ((:intern (MH ?b ?t) :test (and (expression? ?b) (expression? ?t)
                                     (eq (expression-functor ?b)
                                         (expression-functor ?t)))))
  (if (function? (expression-functor ?b))
    (rassert! (implies same-functor (MH ?b ?t) (0.2 . 0.0)))
    (rassert! (implies same-functor (MH ?b ?t) (0.5 . 0.0)))))
```

There are two things to notice here in addition to the evidence rule. First, the proposition *same-functor* was asserted to be true (a belief of 1.0) and then used as the antecedent for the implication of evidence. In this way, the source of this particular piece of evidence is identified and is available for inspection. Second, the assertion of *same-functor* was placed inside the initial-assertion form. Since SME caches the current rule file, it must be told if there are any functions embedded in the rule file that must be invoked each time SME is initialized.

children-of? *base-child target-child base-expression target-expression* [Function]

Nested triggers within an evidence rule may be used to locate interdependencies between different match hypotheses. For example, structure-mapping's systematicity principle is implemented in a local fashion by propagating evidence from a match hypothesis to its children:³

```
(rule ((:intern (MH ?b1 ?t1) :test (and (expression? ?b1) (expression? ?t1)
                                         (not (commutative? (expression-functor ?b1))))))
      (:intern (MH ?b2 ?t2) :test (children-of? ?b2 ?t2 ?b1 ?t1)))
(rassert! (implies (MH ?b1 ?t1) (MH ?b2 ?t2) (0.8 . 0.0))))
```

Evidence for a Gmap is given by:

```
(rule ((:intern (GMAP ?gm) :var ?the-group))
      (dolist (mh (gm-elements ?gm))
        (assert! '(implies ,(mh-form mh) ,?the-group))))
```

The BMS allows a set of nodes to be declared special and will treat evidence to these nodes differently. An additive-nodes function is provided which takes a set of BMS nodes and modifies them so that their evidence is added rather than normalized using Dempster's rule. SME automatically invokes additive-nodes on the derived set of Gmaps once they are created. Thus, when the above Gmap rule is executed and the implies statement is used to supply evidence from each match hypothesis to the Gmap, that evidence is simply automatically added to the total Gmap evidence rather than propagated using Dempster's probabilistic sum.

The following destructive rule is often used instead of the previous one to give a significant speed up:

```
(rule ((:intern (GMAP ?gm) :var ?the-group))
      (setf (node-belief+ (gm-bms-node ?gm)) 0)
      (dolist (mh (gm-elements ?gm))
        (incf (node-belief+ (gm-bms-node ?gm))
              (node-belief+ (mh-bms-node mh)))))
```

This rule bypasses the BMS entirely, thus increasing speed by not creating justification links. It also renders the additive-nodes distinction irrelevant. However, such rules must be used with extreme caution. For example, the source of a Gmap's evidence cannot be inspected when using this type of operation (see Section 6.5).

4.2 Making SME simulate structure-mapping theory

The previous section examined the general structure of an SME rule file. In the process, the basic elements of the *structure-mapping-theory analogy* rule set were presented. The *literal similarity* and *mere-appearance* rules are essentially the same as the *analogy* rules. They differ in the first match constructor rule. The *analogy* rule set has the test (not (attribute? (expression-functor ?b))) which is absent from the corresponding *literal similarity* rule. Conversely, the corresponding *mere appearance* rule forces the opposite condition (attribute? (expression-functor ?b)). One should consult Appendix A of [9] for listings of all three structure-mapping rule sets.

³A number of functions (e.g., children-of?) are provided to simplify the writing of rules. These appear in the file match-rules-support.lisp.

4.3 Making SME perform as SPROUTER

The SPROUTER program [17] was developed as an approach to the problem of inductively forming characteristic concept descriptions. That is, given a sequence of events (e.g., a list of pictures), produce a single, conjunctive description which represents a generalized, characteristic description of the sequence. SPROUTER generalized a sequence of N descriptions by finding the commonalities between the first two descriptions, generalizing these common elements (i.e., variablize the literals), and then repeating the process using this generalized description and the next, unprocessed description. These steps would be repeated until the generalization had propagated through the entire list of input descriptions.

SME may be used to implement SPROUTER's *interference matching* technique by giving it a set of match constructor rules which require all matching predicates to have the same name (i.e., the *literal similarity* rules without the condition that allows functions with different names to match). The SPROUTER generalization mechanism may then be implemented with the following algorithm:

```

Procedure SPROUTER (event-list)
  begin
    generalization := pop(event-list)
    while event-list
      pairwise-match := match(pop(event-list), generalization)
      generalization := generalize(pairwise-match)
    return generalization
  end

```

4.4 Relaxing the identical predicates constraint

The current structure-mapping theory rules are sensitive to representation by requiring that relational predicates match only if they are identical. This is an important restriction that ensures the structures being compared are semantically similar. However, it can also be overly restrictive. We are currently exploring different methods to relax the identity requirement while still maintaining a strong sense of semantic similarity. One approach, called the *minimal ascension principle*, allows relations to match if they share a common ancestor in a multi-root is-a hierarchy of expression types [7] (i.e., the identity test in the match constructor rule is replaced by a call to *predicate-type-intersection?*). The local evidence score for their match is inversely proportional (exponentially) to the relations' distance in the hierarchy. This enables SME to match non-identical relations if such a match is supported by the surrounding structure, while still maintaining a strong preference for matching semantically close relations. This is similar to approaches used in [1,16,24].

Problems with an unconstrained minimal ascension match technique are discussed in [7]. A mapping approach which considers the current context when determining pairwise similarity is also discussed.

4.5 Pure isomorphisms

While it is important to assure that the structures being compared are semantically similar, one can in principle remove all semantic comparisons. This would allow match creation to be guided strictly by SME's structural consistency and 1-1 mapping criteria and match selection to be based strictly on systematicity.

Consider the isomorphic mapping between the formal definitions of numeric addition and set

Addition	Union
$N1 + N2 = N2 + N1$	$S1 \cup S2 \equiv S2 \cup S1$
$N3 + (N4 + N5) = (N3 + N4) + N5$	$S3 \cup [S4 \cup S5] \equiv [S3 \cup S4] \cup S5$
$N6 + 0 = N6$	$S6 \cup \emptyset \equiv S6$

Figure 8: Formal descriptions for addition and union.

union shown in Figure 8.⁴ These formal descriptions may be given to SME in the standard manner, as in (plus N3 (plus N4 N5)) for the left side of the associativity rule (the representation (plus N4 N5 result45) also works, although it results in a slightly longer run time due to the flattening of structure). When presented as formal definitions, the concepts of addition and union are structurally isomorphic, independent of the meaning of the predicates. Thus, while it could be argued that the predicates plus and union share a certain degree of semantic overlap, this example demonstrates that it is possible to make SME ignore predicates entirely and simply look for isomorphic mappings. The rule set for isomorphic mappings is shown in Figure 9. (This is called the ACME rule set, as it configures SME to emulate the ACME program on this example [18]). The only constraint this rule set enforces is that each predicate has the same number of arguments. While it includes the Structure-Mapping notion of systematicity to prefer systems of relations, it does not enforce identity of predicates. Using this rule set, SME produces the unique best mapping that we would expect between the formal definitions of addition and union.

Since SME enforces the "same number of arguments" restriction by defeating any match hypotheses that are not structurally sound, we could in principle effectively remove the rule file entirely. This could be done with one match constructor rule to match everything with everything and one evidence rule to measure systematicity. When this *free-for-all* rules file was given to SME, the same single best Gmap was produced, but at the expense of increasing the run time from 13 seconds to 3.25 minutes.

4.6 Imposing externally established pairings

In certain situations, a number of entity and predicate mappings may already be known prior to invoking SME. These mappings may have been provided as an analogical hint from an instructor or derived by the application program during earlier processing. For example, PHINEAS [4,5] uses SME to analogically relate observed physical phenomena to known theories of the world. PHINEAS uses two analogical mappings to learn about a new physical process. First, behavioral correspondences are established (i.e., what entities and quantities are behaving in the same manner). Second, the relevant base theories are analogically mapped into the new domain, guided by the behavioral correspondences. The two-stage mapping process solves the problem of using analogy in cases where one does not have a pre-existing theory, as occurs with truly novel learning. The assumption made in PHINEAS is that similar behaviors will have similar theoretical explanations. The first mapping provides the correspondences between entities and functions required to guide the importation of an old theory to explain a new domain in the second mapping.

SME includes facilities to simplify writing PHINEAS-like programs, by enabling the results of earlier processing to constrain subsequent mapping tasks. These routines are divided into two

⁴This example is taken from an advance copy of a paper by Holyoak and Thagard [18]. I include it here simply to demonstrate the range of matching preferences available in SME.

```

(MHC-rule (:filter ?b ?t :test (= (numargs (expression-functor ?b))
                                   (numargs (expression-functor ?t))))
  (install-MH ?b ?t))

;;; Intern rule to match entities (non-commutative predicates)
(MHC-rule (:intern ?b ?t :test (and (expression? ?b) (expression? ?t)))
  (do ((bchildren (expression-arguments ?b) (cdr bchildren))
      (tchildren (expression-arguments ?t) (cdr tchildren)))
    ((or (null bchildren) (null tchildren)))
    (if (and (entity? (first bchildren)) (entity? (first tchildren)))
        (install-MH (first bchildren) (first tchildren))))))

;;; Give a uniform initial priming to each MH
(initial-assertion (assert! 'initial-priming))

(rule ((:intern (MH ?b ?t)))
  (rassert! (implies initial-priming (MH ?b ?t) (0.2 . 0.0))))

;;;propagate interconnections - systematicity
(rule ((:intern (MH ?b1 ?t1) :test (and (expression? ?b1) (expression? ?t1)))
      (:intern (MH ?b2 ?t2) :test (children-of? ?b2 ?t2 ?b1 ?t1)))
  (rassert! (implies (MH ?b1 ?t1) (MH ?b2 ?t2) (0.8 . 0.0))))

;;; Support from its MH's
(rule ((:intern (GNAP ?gm) :var ?the-group))
  (dolist (mh (gm-elements ?gm))
    (assert! '(implies ,(mh-form mh) ,?the-group))))

```

Figure 9: Rule set for forming general isomorphic mappings.

categories, *declaration* and *test*. The declaration routines tell SME what predicate and entity correspondences are known *a-priori*. The test routines enable the match constructor rules to adhere to these imposed constraints. Known mappings are declared through the following functions:

```

defGiven-Mappings [Macro]
  entities ((base-entity1 target-entity1)
            (base-entityi target-entityj) ...)
  predicates ((base-predicate1 target-predicate1)
             (base-predicatei target-predicatej) ...)
declare-given-mappings entities predicates [Function]
clear-given-mappings [Function]

```

Both `defGiven-Mappings` and `declare-given-mappings` have identical functionality. The first does not evaluate its arguments while the second one does. Disjunctive constraints may be imposed by including all of the possible pairings (e.g., defining both *(base-entity_i target-entity_j)* and *(base-entity_j target-entity_i)*).

Once a set of given mappings has been declared, the following test routines may be used within the match constructor rules to enforce these mappings:

sanctioned-pairing? *base-item target-item* [Function]
 paired-item? &key *base-item target-item* [Function]

sanctioned-pairing? tests if the given pair is one of the *a-prior* pairings. paired-item? takes either a base item or a target item and returns true if the mapping for that item has been externally determined.

These functions help in writing rules which respect established mappings. For example, the following two rules are used in the PHINEAS system to allow observed behavioral correspondences to constrain the mapping of the relevant theory:

```
(MHC-rule (:filter ?b ?t :test (and (eq (expression-functor ?b) (expression-functor ?t))
                                     (not (paired-item? :base-item (expression-functor ?b)))
                                     (not (paired-item? :target-item (expression-functor ?t)))))
  (install-MH ?b ?t))

(MHC-rule (:filter ?b ?t :test (sanctioned-pairing? (expression-functor ?b)
                                                     (expression-functor ?t)))
  (install-MH ?b ?t))
```

When an analogy is being made between two behaviors, clear-given-mappings is used to make SME perform in normal analogy mode. The discovered entity and function correspondences are then given to declare-given-mappings prior to using SME to map the relevant theory.

5 Representation Issues

The proper representation becomes an issue in SME due to its significant impact on speed performance. Hierarchical representations provide an important source of constraint on generating potential matches. They tend to make the semantic interrelations explicit in the structure of the syntax. For example, Section 4.5 described a comparison between the laws of addition and union. There it was noted that part of the additive associativity rule may be represented as (plus N3 (plus N4 N5)) or as the pair (plus N4 N5 result45) and (plus N3 result45 result3-45). The latter "flat" representation takes more time for SME to process, sometimes a significant difference for large domain descriptions. This is because the functional representation makes the associativity rule structurally explicit, while the flat representation buries it among the tokens appearing as arguments to plus. However, it is important to note that SME is able to process domain descriptions in any predicate-based format. It is simply speed considerations that render standard, flat forms of representation undesirable.

Due to SME's ability to accept commutative, n-ary predicates, it is able to match arbitrary sets (which must be of equal size at this time). This has two consequences. First, the explicit use of sets becomes a viable form of representation. Thus, a theory might be represented concisely as

```
(Theory T1 (SET axiom-8 axiom-14 ...))
```

rather than as (Axiom-of T1 axiom-8), etc. Second, sets may be used to add structure to descriptions. For example, the set representation for theories results in greatly reduced run times compared to the non-set representation.⁵ I am currently investigating the use of a similar representation for temporal states, as in:

⁵The difference in speed is due to the operation of merge step 2, which combines matches sharing a common base structure. The set notation for theory T1 enables merge step 2 to know that matches for axiom-8 and axiom-14 should be placed in the same gmap, thus reducing the number of possibilities in merge step 3.


```
(Situation S1 (SET (Increasing (Amount-of water1))
                   (Increasing (Pressure water1))
                   o o o ))
```

A PHINEAS problem which took SME 53 minutes (using (Increasing (Amount-of (at water1 S1)))) was reduced to 34 seconds using this more structured representation.

6 Using SME

This section describes how to install SME on your machine, load it, and operate it.

6.1 Installing SME

```
*sme-language-file*           [Variable]
*sme-default-rules*           [Variable]
*sme-rules-pathname*          [Variable]
*sme-dgroup-pathname*         [Variable]
```

To configure SME to a particular site, a handful of variables storing system directory information must be edited and set to the appropriate values. These variables appear in `config.lisp`, a separate file for this purpose. Of primary importance are `*sme-language-file*` and `*sme-default-rules*`. These are used by `sme-init` to initialize the language and rule systems. The two variables storing the rules and dgroup pathnames are used by the user interface routines.

```
*the-lisp-package*            [Variable]
*the-user-package*            [Variable]
```

In most Common Lisp implementations, one package exists for general user definitions and another exists for the lisp implementation. It is important to notify SME what these are for the Common Lisp in use. For example, on a Symbolics (version 6.2), the lisp package is called `common-lisp` and the user package is called `cl-user`. These are the default settings.

```
*sme-system-pathname*         [Variable]
*sme-files*                   [Variable]
```

These variables are used to automate compiling and loading. If the system is being loaded on something other than a Symbolics or TI Explorer, the file windowing should not be included in the list `*sme-files*`. Otherwise, it should be left in the list of SME files, which is the default.

The SME routines assume a set of naming conventions on domain description and rule files. The names of files containing domain descriptions (`defDescription`) should end with a `*.dgroup` extension. The name of a file containing a rule set should end with the `*.rules` extension.

6.2 Running SME

```
sme-init &optional (initialize-language? T) (initialize-rules? T) [Function]
```

This section gives a brief overview of the process of using SME for matching, generalization, and inspection tasks.

```

> (sme:sme-init)
Initializing SME...
  Loading default language file: prof:>falken>sme>language
  Loading default rules file: prof:>falken>sme>literal-similarity.bin
Complete.
T
> (load "prof:> falken> sme> simple-water-flow.dgroup")
Loading PROF:>falken>sme>simple-water-flow.dgroup into package USER
#P=PROF:>falken>sme>simple-water-flow.dgroup"
NIL
> (load "prof:> falken> sme> simple-heat-flow.dgroup")
Loading PROF:>falken>sme>simple-heat-flow.dgroup into package USER
#P=PROF:>falken>sme>simple-heat-flow.dgroup"
NIL
> (sme:match 'swater-flow 'sheat-flow T)
      SME Version 2E
      Analogical Match from SWATER-FLOW to SHEAT-FLOW.

```

Rule File: literal-similarity.rules

	# Entities	# Expr.	Maximum order	Average order
Base Statistics	4	11	3	1.36
Target Statistics	4	6	2	1.17

# MH's	# Gmaps	Merge Step 3	CI Generation	Show Best Only
14	3	ACTIVE	ACTIVE	OFF

Total Run Time: 0 Minutes, 0.821 Seconds

BMS Run Time: 0 Minutes, 0.530 Seconds

Best Gmaps: 3

Match Hypotheses:

```

(0.6320 0.0000) (PIPE4 BAR7)
(0.7900 0.0000) (FLAT-WATER FLAT-COFFEE)
  o      o      ;a number of match hypotheses appeared here
(0.8646 0.0000) (WATER1 COFFEE5)
(0.7900 0.0000) (LIQUID-WATER LIQUID-COFFEE)

```

Gmap #1: (BEAKER2 COFFEE5) (DIAM-BEAKER TEMP-COFFEE) (VIAL3 ICE-CUBE6)
(DIAM-VIAL TEMP-ICE-CUBE) (>DIAMETER >TEMP)

Emaps: (BEAKER2 COFFEE5) (VIAL3 ICE-CUBE6)

Weight: 3.937660

Candidate Inferences:

o o ;Gmap #2 appeared here...

Gmap #3: (>PRESSURE >TEMP) (PRESS-VIAL TEMP-ICE-CUBE) (PRESS-BEAKER TEMP-COFFEE)
(BEAKER2 COFFEE5) (VIAL3 ICE-CUBE6) (WATER1 HEAT8)
(PIPE4 BAR7) (WFLOW HFLOW)

Emaps: (BEAKER2 COFFEE5) (VIAL3 ICE-CUBE6) (WATER1 HEAT8) (PIPE4 BAR7)

Weight: 5.991660

Candidate Inferences: (CAUSE >TEMP HFLOW)

Figure 10: Initializing and running SME.

1. *Loading the files.* To load or compile SME, the file `config` should be loaded and then `(load-sme)` or `(compile-sme)` called. A `defSystem` definition is provided in `system.lisp` for Symbolics machines.
2. *System startup.* This stage is only appropriate for full, lisp machine startup. The SME window environment may be created with `Select-S` on a Symbolics or `System-S` on a TI Explorer.
3. *Initialization.* The function `sme-init` should be called to initialize the database. If `initialize-language?` is non-nil, the default language file (predicate definitions) will be loaded. If `initialize-rules?` is non-nil, the default rules file will be loaded. Prior to operating SME, the language and rule systems must be established.
4. *Loading Dgroups.* Any description groups that are to be matched must be declared. These declarations are typically stored in files, with the extension `*.dgroup`. If the windowing system is active, the command `Load Dgroup` will offer a menu of all `*.dgroup` files in `*sme-dgroup-pathname*` to select what to load.
5. *Analogical mapping.* The function `match` may be called to form a mapping between two given Dgroups. This is discussed in Section 7.2.3. If the windowing system is active, the command `Match` will offer a menu to select base and target Dgroups. It is prior to this step that one might want to think about whether to modify any system parameters (e.g., print the match hypotheses, print only the best Gmaps, generate candidate inferences, etc.).
6. *Describing Dgroups.* Once Dgroups are defined, the `describe-dgroup` facility will provide a description of any particular Dgroup.
7. *Graphically displaying Dgroups.* If the windowing system is active, Dgroups may also be displayed graphically, through the `Display Dgroup` utility.
8. *Generalizing.* Once a mapping is formed, it may be generalized using the `generalize` function or the `Generalize` command in the system menu.
9. *Saving the results of a session.* If the windowing system is active, the results of commands like `Match` and `Generalize` are sent to the scroll window by default. These results may be written to a file using the `dump-scroll` system utility.
10. *Comparing two apparently identical Gmaps.* When two Gmaps are formed that appear to be identical, their differences can be identified using the `compare-gmaps` system utility.

A trace of SME performing the basic mapping task is given in Figure 10. Each of the other options are described in greater detail in the following sections.

6.3 Batch mode

<code>run-batch-file</code>	<code>pathname &key (gmap-display :all) (gmap-statistics :none)</code>	[Function]
<code>language-file</code>	<code>pathname</code>	[Macro]
<code>dgroup-directory</code>	<code>pathname</code>	[Macro]
<code>dgroup-file</code>	<code>file-name</code>	[Macro]
<code>rule-directory</code>	<code>pathname</code>	[Macro]
<code>rule-file</code>	<code>file-name</code>	[Macro]
<code>rule-sets</code>	<code>&rest rule-file-names</code>	[Macro]

```
(sme:Dgroup-Directory "prof:>falken>sme>")

(sme:Dgroup-File "solar-system")
(sme:Dgroup-File "rutherford")
(sme:Dgroup-File "simple-water-flow")
(sme:Dgroup-File "simple-heat-flow")

(sme:Rule-Directory "prof:>falken>sme>")

(sme:Rule-Sets "literal-similarity" "true-analogy" "attribute-only") ; iterate over each rule set

(sme:Report-Comments "Sample run of SME to demonstrate batch mode.")

(sme:Send-Report-To "heath:>falken>sample.dmp" :text-driver :LATEX)

(sme:Run-Matcher-On solar-system rutherford-atom) ; map this pair once for each rule set
(sme:Run-Matcher-On swater-flow sheat-flow) ; map this pair once for each rule set
```

Figure 11: Sample SME batch file.

report-comments <i>string</i>	[Macro]
send-report-to <i>pathname &key (text-driver :LPR) (style :STANDARD)</i>	[Macro]
run-matcher-on <i>base-name target-name</i>	[Macro]
defPostMatcher <i>function</i>	[Macro]

SME is normally used as an interactive utility or as a module to some larger program. However, when performing statistical analyses across a broad space of matching preferences (i.e., rule sets) and domain descriptions, an interactive format soon becomes inconvenient. Utilities are provided so that a file of SME instructions may be defined and then executed using `run-batch-file` (e.g., Figure 11). This would instruct SME to perform a series of matches, potentially over a variety of rule sets and domain descriptions, and generate a detailed report of the execution and a summary of the results. When a single rule set is specified using `rule-file`, all subsequent matches (invoked by `run-matcher-on`) will use this rule file until another one is specified. Using `rule-sets`, one may instead specify a series of rule files to be used, so that a single `run-matcher-on` command will cause SME to run once for each rule file in the list. If a user-defined function name is given to `defPostMatcher`, this function will be called after each match is performed, in case special post-match routines are desired or extra information is to be added to the report being generated. A variety of text drivers are supported for report generation (`send-report-to`), such as `:lpr` (line printer), `:latex`, and `:troff`.

6.4 Generalization mechanism

<code>generalize</code> <i>gmap</i>	[Function]
-------------------------------------	------------

The `generalize` function takes a global mapping structure and returns three alternate generalizations (using the Common-Lisp values protocol), each one successively larger than the previous:

1. *Literally common aspects only.* This generalization locates those sub-structures which are identical in both base and target Dgroups. This is a type of generalization typically found in

Generalizations for Match from SWATER-FLOW to SHEAT-FLOW:

Generalization #1 (Literally Common Aspects Only):
(FLOW ENTITY6 ENTITY8 ENTITY13 ENTITY14)

Generalization #2 (All Common Aspects Only):
(FLOW ENTITY6 ENTITY8 ENTITY13 ENTITY14)
(GREATER (FUNCTIONO ENTITY6) (FUNCTIONO ENTITY8))

Generalization #3 (Maximal Generalization):
(CAUSE (GREATER (FUNCTIONO ENTITY6) (FUNCTIONO ENTITY8))
(FLOW ENTITY6 ENTITY8 ENTITY13 ENTITY14))

Figure 12: SME generalizations for the simple water flow - heat flow analogy.

inductive generalization programs.

2. *All common aspects only.* In addition to common, identical substructures, this generalization includes cases where functions of a different name were allowed to match. Where this occurs in the common structure, a skolemized function predicate is created.
3. *Maximal generalization.* The largest generalization (in terms of amount) includes all candidate inferences sanctioned by the Gmap, as well as the common substructure of generalization mode 2. This represents the entire shared structure between the two Dgroups under the assumption that the candidate inferences are valid.

For example, given the best Gmap from the simple water flow - heat flow analogy described in Section 2.1 and shown in Figure 7, SME will produce the set of generalizations shown in Figure 12. The first generalization indicates that the only thing in common between the two situations is the existence of flow. The second generalization loosens the meaning of "in common" to include the fact that a quantity associated with the source of flow was greater than the same quantity measured for the destination. The final generalization assumes that this inequality, which was the cause of flow in the water flow domain, is actually the cause of flow for both situations.

6.5 Inspecting MH and Gmap evidence

match-evidence-inspector

[Function]

When developing a theory about what types of rules should be used and how much evidence for a particular match they should provide, it is often useful to explicitly see what the different sources of evidence were for a particular match item. The system utility match-evidence-inspector may be used to display a trace of the entire evidence facility or just the evidence for a particular match hypothesis or Gmap. For example, the following information was printed out about the pressure to temperature match hypothesis in the water flow - heat flow analogy:

```
(MH F#PRESS-BEAKER F#TEMP-COFFEE) has evidence (0.7120, 0.0000) due to
IMPLICATION((MH F#>PRESSURE F#>TEMP)) (0.5200, 0.0000)
IMPLICATION(CHILDREN-POTENTIAL) (0.4000, 0.0000)
```

While the following information appears for the best Gmap in this analogy:

```
(GMAP #GM3) has evidence (5.9917, 0.0000) due to
  IMPLICATION((MH F#WFLOW F#HFLOW)) (0.7900, 0.0000)
  IMPLICATION((MH I#PIPE20 I#BAR23)) (0.6320, 0.0000)
  IMPLICATION((MH I#WATER17 I#HEAT24)) (0.6320, 0.0000)
  IMPLICATION((MH I#VIAL19 I#ICE-CUBE22)) (0.9318, 0.0000)
  IMPLICATION((MH I#BEAKER18 I#COFFEE21)) (0.9318, 0.0000)
  IMPLICATION((MH F#PRESS-BEAKER F#TEMP-COFFEE)) (0.7120, 0.0000)
  IMPLICATION((MH F#PRESS-VIAL F#TEMP-ICE-CUBE)) (0.7120, 0.0000)
  IMPLICATION((MH F#>PRESSURE F#>TEMP)) (0.6500, 0.0000)
```

The inspection facility will not work for Gmaps if their scores were produced by an external (to the BMS), destructive operation. One such destructive rule appeared at the end of Section 4.1.3.

6.6 Windows

<code>dump-scroll-menu</code>	[Function]
<code>dump-scroll output-pathname</code>	[Function]
<code>clear-scroll</code>	[Function]
<code>select-windowing-configuration</code>	[Function]
<code>select-scroll</code>	[Function]
<code>select-double-scroll</code>	[Function]
<code>select-graphics</code>	[Function]
<code>select-large-graphics</code>	[Function]
<code>select-split</code>	[Function]
<code>*sne-frame*</code>	[Variable]
<code>*graphics-pane*</code>	[Variable]
<code>*scroll-pane*</code>	[Variable]
<code>*spare-scroll-pane*</code>	[Variable]
<code>*lisp-pane*</code>	[Variable]

The windowing system is lisp machine dependent and appears in the file `windowing.lisp`. The loading of this file is optional. When the windowing system is used, a number of window configurations are possible, such as having a single scroll window, two side by side, a single graphics window, or a scroll and graphics window side by side. These configurations may be selected through their individual functions (e.g., `select-scroll`), or through the central configuration facility `select-scroll-graphics`. By default, when the windowing system is active, all SME output is sent to the primary scroll pane. When both scroll windows are in use, the configuration facility allows one to specify which scroll window is currently active. The two scroll dumping routines write the contents of the primary scroll window to a specified file. Output sent to the secondary (*scratchpad*) scroll pane is for observation only and cannot be written to a file.

6.7 System parameters

<code>*sne-parameters*</code>	[Variable]
<code>*parameter-menu-options*</code>	[Variable]
<code>defSME-Parameter variable-name string-description type &optional type-choices</code>	[Macro]

The `defSME-Parameter` form adds a new variable to the list of known SME parameters. This list is used by the windowing interface routines to query the user about possible parameter settings. It is provided primarily for application programs wanting to use the standard SME parameter

```

SME System Parameters
PRINT> Which Gmaps to display: All Gmaps Best Gmaps No Gmaps
PRINT> Display the Gmap statistics table?: All Gmaps Best Gmaps No Gmaps
PRINT> Display the Dgroup statistics table?: Yes No
PRINT> Display all the Match Hypotheses?: Yes No
Require one-to-one correspondences?: Yes No
Allow structural consistency exceptions for relational groups?: Yes No
Generate Candidate Inferences?: Yes No
Run Gmap Merge Step 3?: Yes No
SME Debug Flag: Yes No
Indicate All Changes to the Knowledge Base: Yes No
Default SME Language Definitions File: "prof:>falken>sne>language"
Default SME Dgroup Pathname: "prof:>falken>sne>"
Default SME Rules Pathname: "prof:>falken>sne>"
Exit ☐

```

Figure 13: SME System Parameters.

setting facility. The arguments to `defSME-Parameter` correspond to the appropriate definitions for the `choose-variable-values` function of your particular machine. For example, the following declaration appears in `match.lisp`:

```
(defSME-Parameter *display-all-MH* "Display all the Match Hypotheses" :boolean)
```

`change-parms`

[Function]

The windowing system provides a menu facility for viewing and changing the current values of system parameters. This menu is shown in Figure 13.

6.8 System utilities

`*system-utilities-menu*`

[Variable]

`defSME-Utility string-name lisp-form`

[Macro]

`menu-utilities`

[Function]

`get-dgroup`

[Function]

`get-rules`

[Function]

The SME system utilities are the options that appear when the `Utilities` command is evoked, the right mouse button is pressed, or the function `menu-utilities` is called. These utilities include changing the system parameters, choosing to load a Dgroup or rule file from those in the defined directories, and clearing or writing to file the contents of the scroll window. These routines are lisp machine dependent. The following declaration appears in `match.lisp`:

```
(defSME-Utility "Inspect Evidence" (match-evidence-inspector))
```

7 User Hooks

This section describes the global variables and routines that are available to the user and application programs for the creation and inspection of analogical mappings.

7.1 Applications control over display

`*sme-output-stream*`

[Variable]

`*windowing?*`

[Variable]

`*sme-graphics-output*`

[Variable]

All SME textual display routines send their output to `*sme-output-stream*`. By default, the value of this variable is `T`, which causes output to be sent to `*terminal-io*`, CommonLisp's default pointer to the user's console. When `*sme-output-stream*` is a scroll window (determined by the presence of an `:append-item` handler), the appropriate scroll window routines for sending display items are invoked. Otherwise, text is sent to the current output stream using `format`. Text routines are machine independent.

In a similar manner, all SME graphics output is sent to the current `*sme-graphics-output*` window. Graphics output is lisp machine dependent and relies on the ZGRAPH graphics system.

When the SME windowing system is in operation, `*sme-output-stream*` is set to the primary SME scroll pane (`*scroll-pane*`), `*sme-graphics-output*` is set to the SME graphics pane (`*graphics-pane*`), and `windowing?` is set to `T`.

<code>sme-format</code>	<i>format-string &rest format-args</i>	[Macro]
<code>sme-print</code>	<i>string</i>	[Function]
<code>sme-terpri</code>	<i>&optional (N 1)</i>	[Function]

These routines provide a general interface for sending textual output to the current SME output stream. `sme-format` is equivalent to CommonLisp's `format` routine, except that the printed output is always followed by a newline. The `sme-print` routine is provided for simple situations where only a string is printed or for situations requiring the standard use of `format`, as in building up a line of text through multiple invocations. The printed output of `sme-print` is followed by a newline. When the routine is used for multiple calls of `format`, it should be used in conjunction with CommonLisp's `with-output-to-string`, as in:

```
(sme-print
  (with-output-to-string (stream)
    (format stream "~%Beginning of a line...")
    (format stream "  middle of a line...")
    (format stream "  end of a line.)))
```

When a whole set of operations are carried out within the context of a single `sme-print`, one must be careful not nest calls to `sme-print` (e.g., calling a function in the context of an `sme-print` which itself invokes `sme-print`). Such nesting will cause output to appear backwards from what was intended and may cause the output stream to close improperly.

7.2 Useful miscellaneous functions

Data exists within SME in three forms: (1) local items such as entities, predicates, and expressions, (2) description groups (Dgroups), and (3) analogical mapping information. The routines to create and query these items are described in the following sections.

7.2.1 Entities, predicates, and expressions

<code>entity?</code>	<i>item</i>	[Function]
<code>entity-type?</code>	<i>item</i>	[Function]
<code>entity-name?</code>	<i>symbol</i>	[Macro]
<code>fetch-entity-definition</code>	<i>symbol</i>	[Macro]
<code>entity-domain</code>	<i>symbol</i>	[Macro]
<code>constant-entity?</code>	<i>symbol</i>	[Macro]

Entities declared through `defEntity` represent global entity types, that is, they represent a class of entities rather than an actual instance of an entity. When an entity type is used in the definition of a description group, a unique entity instance is created for that type (e.g., `beaker` is translated to `beaker73`). Thus, a given entity token will represent either a type or an instance. The structure `predicate entity?` returns true if the given item is an entity-instance structure, while `entity-type?` returns true if the item is an entity-type structure. The macro `entity-name?` returns true if the given symbol represents either an entity type or instance. `fetch-entity-definition` will return the entity-type structure for an entity type token or the entity-instance structure for an entity instance token. The routines `entity-domain` and `constant-entity?` refer to the type and constant? keyword values given to `defEntity` when the corresponding entity type was created.

<code>*sme-predicates*</code>	[Variable]
<code>fetch-predicate-definition predicate-symbol</code>	[Macro]
<code>predicate? symbol</code>	[Macro]
<code>predicate-type predicate-symbol</code>	[Macro]
<code>relation? predicate-symbol</code>	[Macro]
<code>attribute? predicate-symbol</code>	[Macro]
<code>function? predicate-symbol</code>	[Macro]
<code>commutative? predicate-symbol</code>	[Macro]
<code>n-ary? predicate-symbol</code>	[Macro]
<code>arg-list predicate-symbol</code>	[Macro]
<code>numargs predicate-symbol</code>	[Macro]
<code>expression-type predicate-symbol</code>	[Macro]
<code>eval-form predicate-symbol</code>	[Macro]

These routines provide the facility to access the various predicate properties defined with the `defPredicate` form. `fetch-predicate-definition` returns the actual `sme-predicate` structure containing all the information about a given predicate.

<code>fetch-expression expression-name dgroup &optional (error-if-absent? T)</code>	[Function]
<code>expression-functor expression-structure</code>	[Function]
<code>fully-expand-expression expression-structure dgroup</code>	[Function]
<code>fully-expand-expression-form expression-form dgroup</code>	[Function]

An "expression" represents an actual predicate instance within a Dgroup. Notice that this includes terms corresponding to function applications as expressions. Each use of a predicate gets its own expression with its own name, so that a higher-order relation gets translated into several expressions, with some having expressions as arguments. These routines allow one to retrieve and inspect expressions in the database. `fetch-expression` returns the expression structure with the given name.

The routines `fully-expand-expression` and `fully-expand-expression-form` are useful for examining the form of an expression. Typically, the expression (`greater-than (diameter beaker) 5`) is stored as the expression `greater-than23`, which has the form (`greater-than diameter24 5`). These routines return a fully expanded expression form, where all expression names are replaced by their corresponding forms.

7.2.2 Dgroups

`fetch-dgroup dgroup-name &optional create?` [Function]
`return-dgroup dgroup-or-dgroup-name` [Function]

Description groups (Dgroups) are stored in a simple data base managed primarily by routines in `sme.lisp`. The general procedures for Dgroup and expression creation were described in sections 3.3 and 3.4. A Dgroup may be retrieved by name using `fetch-dgroup`, or created if `create?` is non-nil and no Dgroup with the given name currently exists. `return-dgroup` is designed for routines that may take either an actual Dgroup or simply a Dgroup name (e.g., `fetch-expression`). It will cause an error if the Dgroup does not previously exist.

`describe-dgroup dgroup` [Function]
`menu-display-dgroup` [Function]
`menu-display-pairs` [Function]

A Dgroup may be textually described using `describe-Dgroup`, which writes to the SME output stream. Graphical display is provided in the windowing system by `menu-display-dgroup` for a single Dgroup or `menu-display-pairs` for a display of two Dgroups side by side.

7.2.3 Creating and inspecting global matches

`match base-name target-name &optional display?` [Function]
`best-gmaps &optional (gmaps *gmaps*) (percentage-range 0.02)` [Function]
`display-match base target &optional (total-run-time 0) (bms-run-time 0)` [Function]

The match function is the central SME procedure. Given the names of two Dgroups, it forms the complete set of global mappings between them. If `display?` is non-nil, a description of the results will be sent to the current SME output stream. The function itself returns two values, the total run time of the match process in seconds and the subset of that time spent running the BMS evidence rules. The analogical mapping results are stored in the following global variables, which are then accessible by the user or application program.

`*base*` [Variable]
`*target*` [Variable]
`*match-hypotheses*` [Variable]
`*gmaps*` [Variable]

The Gmap(s) with the highest evaluation score are retrieved by `best-gmaps`, which returns all Gmaps having a score within a given percentage (default is 2%) of the highest score. `best-gmaps` returns two values: the list of best Gmaps and the actual real-valued highest score.

`compare-gmaps gmap1 gmap2 &optional display?` [Function]

Occasionally, SME will produce two or more "best" Gmaps that appear to be identical yet have been classified as distinct. When these Gmaps are large, the "here's the set of match hypotheses" output format can make it frustrating to find what the slight differences are between a pair of Gmaps. When given two Gmap structures, `compare-gmaps` will return (using values) the list of the match hypotheses that are uniquely part of the first Gmap and a list of match hypotheses that are uniquely part of the second Gmap (i.e., (`gmap1 - gmap2`) and (`gmap2 - gmap1`)). When the windowing system is active, this option is available through the system utilities menu.

8 Algorithm Internals

This section quickly describes a few internal points of the program in case one has specialized needs for interfacing to the code. It assumes knowledge of CommonLisp and the realization that for many questions, the only feasible answer must be to examine the SME program.

8.1 The Match Function

<code>create-match-hypotheses</code>	<i>base-dgroup target-dgroup</i>	[Function]
<code>run-rules</code>		[Function]
<code>calculate-nogoods</code>	<i>base-dgroup target-dgroup</i>	[Function]
<code>generate-gmaps</code>		[Function]
<code>gather-inferences</code>	<i>base-dgroup target-dgroup</i>	[Function]
<code>intern-gmaps</code>		[Function]

The function `match` is primarily a sequence of calls to these functions. `create-match-hypotheses` runs the match constructor rules to form the individual match hypotheses. The BMS evidence rules are then run on these match hypotheses (`run-rules`) and their dependence and inconsistency relationships are determined (`calculate-nogoods`). The function `generate-gmaps` executes the three merge steps, resulting in the set of complete global mappings being placed in the variable `*gmaps*`. The candidate inferences each Gmap sanctions is then calculated (`gather-inferences`) and additive BMS nodes for each Gmap are formed (`intern-gmaps`), allowing the evidence rules to run on each Gmap.

8.2 Match Hypotheses

<code>match-hypothesis</code>	[Defstruct]
<code>mh-form</code>	<i>match-hypothesis</i> [Subst]
<code>mh-base-item</code>	<i>match-hypothesis</i> [Subst]
<code>mh-target-item</code>	<i>match-hypothesis</i> [Subst]
<code>mh-bms-node</code>	<i>match-hypothesis</i> [Subst]
<code>node-belief+</code>	<i>bms-node</i> [Subst]
<code>mh-plist</code>	<i>match-hypothesis</i> [Subst]
<code>*match-hypotheses*</code>	[Variable]

Most programs using SME will need to interact with the *match hypothesis structures*. Slots to this structure type use the `mh-` prefix. There are several slots that might be important. The MH form, which is a list of (MH <base-item> <target-item>), is found using `mh-form`. This is the form used for triggering the MH evidence rules, and is asserted in the BMS for each match hypothesis. The base and target items are expression or entity structures. The base item or target item may be obtained directly using `mh-base-item` and `mh-target-item`, respectively. The BMS node for each match hypothesis is found by `mh-bms-node`. In turn, the weight for that node may be obtained using `node-belief+`. Finally, each match hypothesis structure has a property list slot (`mh-plist`) which may be useful for various purposes.

8.3 Global Mappings

<code>global-mapping</code>	[Defstruct]
<code>gm-id</code>	<i>global-mapping</i> [Subst]

<code>gm-elements</code>	<i>global-mapping</i>	[Subst]
<code>gm-emaps</code>	<i>global-mapping</i>	[Subst]
<code>gm-base</code>	<i>global-mapping</i>	[Subst]
<code>gm-target</code>	<i>global-mapping</i>	[Subst]
<code>gm-inferences</code>	<i>global-mapping</i>	[Subst]
<code>gm-bms-node</code>	<i>global-mapping</i>	[Subst]
<code>gm-plist</code>	<i>global-mapping</i>	[Subst]
<code>*gmaps*</code>		[Variable]

Each Gmap is stored as a *global-mapping structure*. Slots to this structure type use the `gm-` prefix. Each Gmap is assigned a unique integer identifier, found through `gm-id`. The Gmap form used by the BMS is not explicitly available, but is asserted as `(Gmap <gmap-structure>)`. The match hypotheses associated with a Gmap are stored in `gm-elements`, while the subset of these that are entity mappings is stored in `gm-emaps`. The candidate inferences sanctioned by the Gmap appear in `gm-inferences` and are stored as a simple list data type, using the syntax defined in Section 3.3 for description group expressions.

8.4 Candidate Inference Generation

The original candidate inference generator, as described in [8], will take any base structure "intersecting the Gmap structure". The newer (V. 2) edition only takes base structure "intersecting a Gmap root". Thus, the newer edition is more cautious and far more efficient than the older edition. Both versions of the code are available (in `match.lisp`), with the default being the newer, more cautious version. There are theoretical arguments for and against each approach. For example, one might want to use only the inferences from the newer, more cautious approach at first since they are supported by more target knowledge and thus more likely valid. If an analogy proves fruitful, one may want to relax these constraints, and use the older version to find out what additional inferences might be made.

8.5 Rule System

<code>tre-rules-file</code>	[Function]
<code>tre-save-rules</code>	[Function]
<code>tre-init</code>	[Function]
<code>restore-rules</code>	[Function]
<code>run-rules</code>	[Function]
<code>*tre-rules-saver*</code>	[Variable]
<code>*initial-assertions*</code>	[Variable]

When a new rules file is loaded, the `sme-rules-file` command at the top of the file initializes the BMS rule system prior to loading the new set of rules. At the bottom of the rules file, the fresh, just-loaded set of rules are saved in the global variable `*tre-rules-saver*` by the command `tre-save-rules`. This variable saves the status of the rule counters and the list of initial rules. A similar variable, `*initial-assertions*`, is used to store all assertions appearing in the rules file. When the BMS is run, new rules may be created and added to the known set of rules. As a result, each time `match` is invoked, the BMS is reinitialized to its status just after loading the rule file, that is, it is restored to the status indicated in `*tre-rules-saver*`.

This facility may be used by application programs to save different rule sets in memory and swap them as needed, without having to load rule files each time. For example, suppose SME is

invoked, which will cause it to run the current rule set for Gmap scoring. If a second scoring criterion is then desired, a second set of rules may be invoked using code of the form:

```
(let ((save-rules sme:*tre-rules-saver*)           ;save the previous rule set
      (save-assertions sme:*initial-assertions*))
  (setq sme:*tre-rules-saver* *my-other-rules-set-rules*)
  (setq sme:*initial-assertions* *my-other-rules-set-assertions*)
  (sme:tre-init)                                   ;initialize with new rules
  (sme:run-rules)                                  ;run the new rule set
  (setq sme:*tre-rules-saver* save-rules)          ;restore the original rules
  (setq sme:*initial-assertions* save-assertions))
```

This saves SME's normal rule set, runs a different one, and then restores the rule set to its previous value. In this example, *tre-init* was used, which fully initializes the BMS. If the desire is simply to supply additional rules without destroying the current BMS state, *restore-rules* should be used in place of *tre-init*. The variables corresponding to "my-other-rules-set" may be initialized by a similar program which saves the current rule set, *loads* the desired "other rule set" file, sets the "my-other-rules-set" variables from **tre-rules-saver** and **initial-assertions**, and then restores the original rule set.

9 Summary

The SME program has been described from the perspective of how to actually use it. A number of methods have been presented about how to configure SME to perform a variety of different types of matches. It is hoped that SME may serve as a general mapping tool for research on analogical mapping, allowing researchers to focus on the more substantive issue of general theories of analogical mapping, as opposed to worrying about implementation details. The latter has the unfortunate effect of producing the repeated scenario in which analogy researcher A goes to analogy researcher B and says "My program can do X, which yours cannot", followed by researcher B returning a month later with this simple modification added. By testing different theories within the same program, we may now compare the more critical "This is a logical consequence of my theory". A program does not a theory make. It can, however, function as a useful analytical tool.

Of course, not all of the problems of implementing analogical mapping have been solved. Most critical is redesigning the potentially combinatoric merge step 3, perhaps using either a heuristic search or connectionist relaxation network as suggested in [9]. Of theoretical relevance is the appropriateness of the abstract structural approach which SME embodies.

10 Acknowledgements

The development of SME has been a collaborative effort with Ken Forbus and Dedre Gentner, with significant influence provided by Janice Skorstad. This work has also benefited from discussions with Steve Chien, John Collins, and Ray Mooney.

This research is supported in part by an IBM graduate fellowship and in part by the Office of Naval Research, Contract No. N00014-85-K-0559.

References

- [1] Burstein, M., Concept formation by incremental analogical reasoning and debugging, *Proceedings of the Second International Workshop on Machine Learning*, University of Illinois,

- Monticello, Illinois, June, 1983. A revised version appears in *Machine Learning: An Artificial Intelligence Approach Vol. II*, R.S. Michalski, J.G. Carbonell, and T.M. Mitchell (Eds.), Morgan Kaufman, 1986.
- [2] Carbonell, J.G., Learning by Analogy: Formulating and generalizing plans from past experience, in: *Machine Learning: An Artificial Intelligence Approach*, R.S. Michalski, J.G. Carbonell, and T.M. Mitchell (Eds.), Morgan Kaufman, 1983.
 - [3] Falkenhainer, B., Towards a general-purpose belief maintenance system, in: J.F. Lemmer & L.N. Kanal (Eds.), *Uncertainty in Artificial Intelligence, Volume II*, 1987. Also Technical Report, UIUCDCS-R-87-1717, Department of Computer Science, University of Illinois, 1987.
 - [4] Falkenhainer, B., An examination of the third stage in the analogy process: Verification-Based Analogical Learning, Technical Report UIUCDCS-R-86-1302, Department of Computer Science, University of Illinois, October, 1986. A summary appears in *Proceedings of the Tenth International Joint Conference on Artificial Intelligence*, Milan, Italy, August, 1987.
 - [5] Falkenhainer, B., Scientific theory formation through analogical inference, *Proceedings of the Fourth International Machine Learning Workshop*, Irvine, CA, June, 1987.
 - [6] Falkenhainer, B. The utility of difference-based reasoning, *Proceedings of the Seventh National Conference on Artificial Intelligence*, St. Paul, August, 1988.
 - [7] Falkenhainer, B., Learning from physical analogies: A study in analogy and the explanation process, Ph.D. Thesis, University of Illinois, December, 1988.
 - [8] Falkenhainer, B., K.D. Forbus, D. Gentner, The Structure-Mapping Engine, *Proceedings of the Fifth National Conference on Artificial Intelligence*, August, 1986.
 - [9] Falkenhainer, B., K.D. Forbus, D. Gentner, The Structure-Mapping Engine: Algorithm and Examples, Technical Report UIUCDCS-R-87-1361, Department of Computer Science, University of Illinois, July, 1987. To appear in *Artificial Intelligence*.
 - [10] Forbus, K.D. and D. Gentner. Learning physical domains: Towards a theoretical framework, in: *Machine Learning: An Artificial Intelligence Approach Vol. II*, R.S. Michalski, J.G. Carbonell, and T.M. Mitchell (Eds.), Morgan Kaufmann, 1986.
 - [11] Gentner, D. *The Structure of Analogical Models in Science*, BBN Tech. Report No. 4451, Cambridge, MA., Bolt Beranek and Newman Inc., 1980.
 - [12] Gentner, D. Structure-Mapping: A Theoretical Framework for Analogy, *Cognitive Science* 7(2), 1983.
 - [13] Gentner, D. Mechanisms of analogy. To appear in S. Vosniadou and A. Ortony, (Eds.), *Similarity and analogical reasoning*, Cambridge University Press, Oxford.
 - [14] Gentner, D. Analogical inference and analogical access, To appear in A. Preiditis (Ed.), *Analogica: Proceedings of the First Workshop on Analogical Reasoning*, London, Pitman Publishing Co. Presented in December, 1986.
 - [15] Gentner, D., B. Falkenhainer, and J. Skorstad Metaphor: The good, the bad and the ugly. *Proceedings of the Third Conference on Theoretical Issues in Natural Language Processing*, Las Cruces, New Mexico, January, 1987.

- [16] Greiner, R., Learning by understanding analogies, PhD Thesis (STAN-CS-1071), Department of Computer Science, Stanford University, September, 1985.
- [17] Hayes-Roth, F., J. McDermott, An interference matching technique for inducing abstractions, *Communications of the ACM*, 21(5), May, 1978.
- [18] Holyoak, K., & Thagard, P. Analogical mapping by constraint satisfaction, June, 1988, (*submitted for publication*).
- [19] Indurkha, B., Constrained semantic transference: A formal theory of metaphors, Technical Report 85/008, Boston University, Department of Computer Science, October, 1985.
- [20] Kedar-Cabelli, S., Purpose-directed analogy. *Proceedings of the Seventh Annual Conference of the Cognitive Science Society*, Irvine, CA, 1985.
- [21] Reed, S.K., A structure-mapping model for word problems. Paper presented at the meeting of the Psychonomic Society, Boston, 1985.
- [22] Rumelhart, D.E., & Norman, D.A., Analogical processes in learning. In J.R. Anderson (Ed.), *Cognitive skills and their acquisition*, Hillsdale, N.J., Erlbaum, 1981.
- [23] Skorstad, J., B. Falkenhainer and D. Gentner Analogical Processing: A simulation and empirical corroboration, *Proceedings of the Sixth National Conference on Artificial Intelligence*, Seattle, WA, August, 1987.
- [24] Winston, P.H., Learning and Reasoning by Analogy, *Communications of the ACM*, 23(12), 1980.
- [25] Winston, P.H., Learning new principles from precedents and exercises, *Artificial Intelligence*, 19, 321-350, 1982.

Index

- algorithm, 4-9, 9
 - summary, 3
- analogical hint, 16
- arg-list macro, 27
- assert! function, 13
- attribute? macro, 27
-
- *base* variable, 28
- batch mode, 22
- best-gmaps function, 28
-
- calculate-nogoods function, 29
- candidate inference, 8
 - alternate algorithms, 30
 - gather-inferences, 29
- change-parms function, 25
- children-of? function, 14
- clear-given-mappings function, 17
- clear-scroll function, 24
- commutative? macro, 27
- compare-gmaps function, 28
- constant-entity? macro, 27
- conventions, 1
 - file names, 19
 - function names, 1
- create-match-hypotheses function, 29
-
- declare-given-mappings function, 17
- defDescription macro, 11
- defEntity macro, 10
- define-description function, 11
- define-Entity function, 10
- define-predicate function, 10
- defPostMatcher macro, 22
- defPredicate macro, 10
- defSME-Parameter macro, 25
- defSME-Utility macro, 25
- describe-dgroup function, 28
- description group, 11
 - graphical display, 28
 - retrieval, 28
 - textual description, 28
- Dgroup, 11
- dgroup-directory macro, 22
- dgroup-file macro, 22
- display-match function, 28
-
- dump-scroll function, 24
- dump-scroll-menu function, 24
-
- entity, 10
 - declaring, 10
- entity? function, 26
 - inspection functions, 27
- entity-domain macro, 27
- entity-name? macro, 27
- entity-type? function, 26
- eval-form macro, 27
- execution, 20
- expression, 11
 - adding new expressions, 11
- expression function, 11
 - inspection functions, 27
- expression-functor function, 27
- expression-type macro, 27
-
- fetch-dgroup function, 28
- fetch-entity-definition macro, 27
- fetch-expression function, 27
- fetch-predicate-definition macro, 27
- file organization, 1
- fully-expand-expression function, 27
- fully-expand-expression-form function, 27
- function? macro, 27
-
- gather-inferences function, 29
- generalize, 15
- generalize function, 23
- generate-gmaps function, 29
- get-dgroup function, 25
- get-rules function, 25
- global mapping, 5, 7-9, 9
 - comparing apparently identical gmaps, 28
 - creation, 28
 - defstruct, 30
 - *gmaps*, 28
 - scoring, 8, 14
 - selecting the best, 28
 - textual display, 28
- *gmaps* variable, 28, 30
- gm-base subst, 30
- gm-bms-node subst, 30
- gm-elements subst, 30

- gm-emaps subst, 30
- gm-id subst, 30
- gm-inferences subst, 30
- gm-plist subst, 30
- gm-target subst, 30
- *graphics-pane* variable, 24
- initial-assertion macro, 13
- *initial-assertions* variable, 30
- installation, 19
- install-MH function, 12
- intern-gmaps function, 29
- language-file macro, 22
- lisp machine interface, 24
 - predicate documentation, 10
- *lisp-pane* variable, 24
- match constructor rules, 12
- match evidence rules, 13
- match function, 28
- match hypothesis, 4-5, 5
 - defstruct, 29
 - inspecting evidence justifications, 23
 - installing, 12
 - *match-hypotheses*, 28
 - scoring, 13-14, 14
- match-evidence-inspector function, 23
- *match-hypotheses* variable, 28-29, 29
- menu-display-dgroup function, 28
- menu-display-pairs function, 28
- menu-utilities function, 25
- mh-base-item subst, 29
- mh-bms-node subst, 29
- MHC-rule, 12
- mh-form subst, 29
- mh-plist subst, 29
- mh-target-item subst, 29
- n-ary? macro, 27
- node-belief+ subst, 29
- numargs macro, 27
- packages, 1
 - site specific, 19
- paired-item? function, 18
- *parameter-menu-options* variable, 25
- parameters, 25
 - site specific, 1, 19
- predicate, 10
 - declaring, 10
 - inspection functions, 27
- predicate? macro, 27
- predicate-type macro, 27
- rassert! macro, 13
- relation? macro, 27
- report generation, 22
- report-comments macro, 22
- representation issues, 18
- restore-rules function, 30
- return-dgroup function, 28
- rule macro, 13
- rule system, 12-18, 18
 - analogical hints, 16
 - dynamically swapping rule sets, 30
 - giving it access to gmaps, 29
 - match constructor rules, 12
 - match evidence rules, 13
 - pure isomorphisms, 16
 - relaxing identical predicates, 15
 - rule file syntax, 12
 - run-rules, 29
 - simulating SPROUTER, 15
 - simulating structure-mapping theory, 15
- rule-directory macro, 22
- rule-file macro, 22
- rule-sets macro, 22
- run-batch-file function, 22
- run-matcher-on macro, 22
- running SME, 20
- run-rules function, 29-30, 30
- sanctioned-pairing? function, 18
- scroll windows, 24
 - saving contents, 24
 - writing to, 24, 26
- *scroll-pane* variable, 24
- select-double-scroll function, 24
- select-graphics function, 24
- select-large-graphics function, 24
- select-scroll function, 24
- select-split function, 24
- select-windowing-configuration function, 24
- send-report-to macro, 22
- site specific information, 19
 - packages, 19

- pathnames, 19
- *sme-default-rules* variable, 19
- *sme-dgroup-pathname* variable, 19
- *sme-files* variable, 19
- sme-format macro, 26
- *sme-frame* variable, 24
- *sme-graphics-output* variable, 26
- sme-init function, 20
- *sme-language-file* variable, 19
- *sme-output-stream* variable, 26
- *sme-parameters* variable, 25
- *sme-predicates* variable, 27
- sme-print function, 26
- sme-rules-file function, 12
- *sme-rules-pathname* variable, 19
- *sme-system-pathname* variable, 19
- sme-terpri function, 26
- *spare-scroll-pane* variable, 24
- system utilities, 25
- *system-utilities-menu* variable, 25

- *target* variable, 28
- *the-lisp-package* variable, 19
- *the-user-package* variable, 19
- tre-init function, 30
- tre-rules-file function, 30
- *tre-rules-saver* variable, 30
- tre-save-rules function, 12, 30

- *windowing?* variable, 26

Distribution List [Illinois/Gentner] NR 887-551

Dr. Phillip L. Ackerman
University of Minnesota
Department of Psychology
75 East River Road
N218 Elliott Hall
Minneapolis, MN 55455

Dr. Beth Adelson
Department of Computer Science
Tufts University
Medford, MA 02155

AFOSR,
Life Sciences Directorate
Bolling Air Force Base
Washington, DC 20332

Dr. Robert Ahlers
Code N711
Human Factors Laboratory
Naval Training Systems Center
Orlando, FL 32813

Dr. John R. Anderson
Department of Psychology
Carnegie-Mellon University
Schenley Park
Pittsburgh, PA 15213

Dr. Stephen J. Andriole, Chairman
Department of Information Systems
and Systems Engineering
George Mason University
4400 University Drive
Fairfax, VA 22030

Technical Director, ARI
5001 Eisenhower Avenue
Alexandria, VA 22333

Dr. Patricia Baggett
School of Education
610 E. University, Rm 1302D
University of Michigan
Ann Arbor, MI 48109-1259

Dr. Eva L. Baker
UCLA Center for the Study
of Evaluation
145 Moore Hall
University of California
Los Angeles, CA 90024

Dr. Meryl S. Baker
Navy Personnel R&D Center
San Diego, CA 92152-6800

prof. dott. Bruno G. Bara
Unita di ricerca di
intelligenza artificiale
Universita di Milano
20122 Milano - via F. Sforza 23
ITALY

Dr. William M. Bart
University of Minnesota
Dept. of Educ. Psychology
330 Burton Hall
178 Pillsbury Dr., S.E.
Minneapolis, MN 55455

Leo Beltracchi
United States Nuclear
Regulatory Commission
Washington DC 20555

Dr. Gautam Biswas
Department of Computer Science
Box 1688, Station B
Vanderbilt University
Nashville, TN 37235

Dr. John Black
Teachers College, Box 8
Columbia University
525 West 120th Street
New York, NY 10027

Dr. Sue Bogner
Army Research Institute
ATTN: PERI-SF
5001 Eisenhower Avenue
Alexandria, VA 22333-5600

Dr. Jeff Bonar
Learning R&D Center
University of Pittsburgh
Pittsburgh, PA 15260

Dr. Gordon H. Bower
Department of Psychology
Stanford University
Stanford, CA 94306

Dr. Robert Breaux
Code 7B
Naval Training Systems Center
Orlando, FL 32813-7100

Dr. Ann Brown
Center for the Study of Reading
University of Illinois
51 Gerty Drive
Champaign, IL 61280

Dr. John S. Brown
XEROX Palo Alto Research
Center
3333 Coyote Road
Palo Alto, CA 94304

Dr. John T. Bruer
James S. McDonnell Foundation
Suite 1610
1034 South Brentwood Blvd.
St. Louis, MO 63117

Dr. Bruce Buchanan
Computer Science Department
Stanford University
Stanford, CA 94305

LT COL Hugh Burns
AFHRL/IDI
Brooks AFB, TX 78235

Dr. Joseph C. Campione
Center for the Study of Reading
University of Illinois
51 Gerty Drive
Champaign, IL 61820

Dr. Joanne Capper, Director
Center for Research into Practice
1718 Connecticut Ave., N.W.
Washington, DC 20009

Dr. Jaime G. Carbonell
Computer Science Department
Carnegie-Mellon University
Schenley Park
Pittsburgh, PA 15213

Dr. Susan Carey
Department of Cognitive
and Neural Science
MIT
Cambridge, MA 02139

Distribution List [Illinois/Gentner] NR 667-551

Dr. Pat Carpenter
Carnegie-Mellon University
Department of Psychology
Pittsburgh, PA 15213

CDR Robert Carter
Office of the Chief
of Naval Operations
OP-933D4
Washington, DC 20350-2000

Chair, Dept. of Psychology
College of Arts and Sciences
Catholic Univ. of America
Washington, DC 20064

Dr. Fred Chang
Pacific Bell
2600 Camino Ramon
Room 3S-450
San Ramon, CA 94583

Dr. Davida Charney
English Department
Penn State University
University Park, PA 16802

Dr. Michele Chi
Learning R & D Center
University of Pittsburgh
3939 O'Hara Street
Pittsburgh, PA 15260

Professor Chu Tien-Chen
Mathematics Department
National Taiwan University
Taipei, TAIWAN

Dr. William Clancey
Institute for Research
on Learning
3333 Coyote Hill Road
Palo Alto, CA 94304

Dr. Charles Clifton
Tobia Hall
Department of Psychology
University of
Massachusetts
Amherst, MA 01003

Assistant Chief of Staff
for Research, Development,
Test, and Evaluation
Naval Education and
Training Command (N-5)
NAS Pensacola, FL 32508

Dr. Allan M. Collins
Bolt Beranek & Newman, Inc.
10 Moulton Street
Cambridge, MA 02238

Dr. Stanley Collyer
Office of Naval Technology
Code 222
800 N. Quincy Street
Arlington, VA 22217-5000

Brian Dallman
Training Technology Branch
3400 TCHTW/TTGXC
Lowry AFB, CO 80230-5000

Goery Delacote
Directeur de L'informatique
Scientifique et Technique
CNRS
15, Quai Anatole France
75700 Paris, FRANCE

Dr. Denise Dellarosa
Psychology Department
Box 11A, Yale Station
Yale University
New Haven, CT 06520-7447

Dr. Thomas E. DeZern
Project Engineer, AI
General Dynamics
PO Box 748/Mail Zone 2646
Fort Worth, TX 76101

Dr. Andrea di Sessa
University of California
School of Education
Tolman Hall
Berkeley, CA 94720

Dr. R. K. Dismukes
Associate Director for Life Sciences
AFOSR
Bolling AFB
Washington, DC 20332

Defense Technical
Information Center
Cameron Station, Bldg 5
Alexandria, VA 22314
Attn: TC
(12 Copies)

Dr. Thomas M. Duffy
Communications Design
Center, 160 BH
Carnegie-Mellon University
Schenley Park
Pittsburgh, PA 15213

Dr. Richard Duran
Graduate School of Education
University of California
Santa Barbara, CA 93106

Dr. John Ellis
Navy Personnel R&D Center
Code 51
San Diego, CA 92252

Dr. Susan Epstein
144 S. Mountain Avenue
Montclair, NJ 07042

ERIC Facility-Acquisitions
4350 East-West Hwy., Suite 1100
Bethesda, MD 20814-4475

Dr. Beatrice J. Farr
Army Research Institute
PERI-IC
5001 Eisenhower Avenue
Alexandria, VA 22333

Dr. Marshall J. Farr, Consultant
Cognitive & Instructional Sciences
2520 North Vernon Street
Arlington, VA 22207

Dr. Paul Feltoovich
Southern Illinois University
School of Medicine
Medical Education Department
P.O. Box 3926
Springfield, IL 62708

Distribution List [Illinois/Gentner] NR 007-551

Mr. Wallace Fourke
Educational Technology
Bolt Beranek & Newman
10 Moulton St.
Cambridge, MA 02238

Dr. Gerhard Fischer
University of Colorado
Department of Computer Science
Boulder, CO 80309

Dr. J. D. Fletcher
Institute for Defense Analysis
1801 N. Beauregard St.
Alexandria, VA 22311

Dr. Linda Flower
Carnegie-Mellon University
Department of English
Pittsburgh, PA 15213

Dr. Kenneth D. Forbus
University of Illinois
Department of Computer Science
1304 West Springfield Avenue
Urbana, IL 61801

Dr. Barbara A. Fox
University of Colorado
Department of Linguistics
Boulder, CO 80309

Dr. John R. Frederiksen
BBN Laboratories
10 Moulton Street
Cambridge, MA 02238

Dr. Norman Frederiksen
Educational Testing Service
(05-R)
Princeton, NJ 08541

Julie A. Gaden
Information Technology
Applications Division
Admiralty Research Establishment
Portsmouth, Portsmouth PO6 4AA
UNITED KINGDOM

Dr. Dedre Gentner
University of Illinois
Department of Psychology
603 E. Daniel St.
Champaign, IL 61820

Chair, Department of
Psychology
Georgetown University
Washington, DC 20057

Dr. Robert Glaser
Learning Research
& Development Center
University of Pittsburgh
3939 O'Hara Street
Pittsburgh, PA 15260

Dr. Arthur M. Glenberg
University of Wisconsin
W. J. Brogden Psychology Bldg.
1202 W. Johnson Street
Madison, WI 53706

Dr. Sam Glucksberg
Department of Psychology
Princeton University
Princeton, NJ 08540

Dr. Susan R. Goldman
Dept. of Education
University of California
Santa Barbara, CA 93106

Dr. Sherrie Gott
AFHRL/MOMJ
Brooks AFB, TX 78235-5601

Dr. T. Govindaraj
Georgia Institute of
Technology
School of Industrial
and Systems Engineering
Atlanta, GA 30332-0205

Dr. Wayne Gray
Army Research Institute
5001 Eisenhower Avenue
Alexandria, VA 22333

Dr. James G. Greeno
School of Education
Stanford University
Room 311
Stanford, CA 94305

Dr. Dik Gregory
Admiralty Research
Establishment/AXB
Queens Road
Teddington
Middlesex, ENGLAND TW110LN

Dr. Gerhard Grossing
Atominstut
Schuttelstrasse 115
Vienna
AUSTRIA A-1020

Prof. Edward Haertel
School of Education
Stanford University
Stanford, CA 94305

Dr. Henry M. Half
Half Resources, Inc.
4918 33rd Road, North
Arlington, VA 22207

Dr. Ronald K. Hambleton
University of Massachusetts
Laboratory of Psychometric
and Evaluative Research
Hills South, Room 152
Amherst, MA 01003

Dr. Bruce W. Hamill
Research Center
The Johns Hopkins University
Applied Physics Laboratory
Johns Hopkins Road
Laurel, MD 20707

Stevan Harnad
Editor, The Behavioral and
Brain Sciences
20 Nassau Street, Suite 240
Princeton, NJ 08542

Dr. Reid Hastie
Northwestern University
Department of Psychology
Evanston, IL 60208

Dr. John R. Hayes
Carnegie-Mellon University
Department of Psychology
Schenley Park
Pittsburgh, PA 15213

Distribution List [Illinois/Gentner] NR 667-551

Dr. Barbara Hayes-Roth
Knowledge Systems Laboratory
Stanford University
701 Welch Road
Palo Alto, CA 94304

Dr. Frederick Hayes-Roth
Teknowledge
P.O. Box 10119
1850 Embarcadero Rd.
Palo Alto, CA 94303

Dr. James D. Hollan
MCC
3500 W. Balcones Ctr. Dr.
Austin, TX 78759

Dr. Melissa Holland
Army Research Institute for the
Behavioral and Social Sciences
5001 Eisenhower Avenue
Alexandria, VA 22333

Dr. Keith Holyoak
Department of Psychology
University of California
Los Angeles, CA 90024

Ms. Julia S. Hough
Lawrence Erlbaum Associates
110 W. Harvey Street
Philadelphia, PA 19144

Dr. Ed Hutchins
Intelligent Systems Group
Institute for
Cognitive Science (C-015)
UCSD
La Jolla, CA 92093

Dr. Barbara Hutson
Virginia Tech
Graduate Center
2990 Telestar Ct.
Falls Church, VA 22042

Dr. Alice M. Isen
Department of Psychology
University of Maryland
Catonville, MD 21228

Dr. Janet Jackson
Rijksuniversiteit Groningen
Biologisch Centrum, Vleugel D
Kerklaan 30, 9751 NN Haren
The NETHERLANDS

Dr. Robert Jannarone
Elec. and Computer Eng. Dept.
University of South Carolina
Columbia, SC 29208

Dr. Claude Jauvier
Universite' du Quebec a Montreal
P.O. Box 8888, succ: A"
Montreal, Quebec H3C 3P8
CANADA

Dr. Robin Jeffries
Hewlett-Packard Laboratories, 3L
P.O. Box 10490
Palo Alto, CA 94303-0971

Chair, Department of
Psychology
The Johns Hopkins University
Baltimore, MD 21218

Dr. Douglas H. Jones
Thatcher Jones Associates
P.O. Box 6640
10 Trafalgar Court
Lawrenceville, NJ 08648

Dr. Marcel Just
Carnegie-Mellon University
Department of Psychology
Schenley Park
Pittsburgh, PA 15213

Dr. Daniel Kahneman
Department of Psychology
University of California
Berkeley, CA 94720

Dr. Ruth Kanfer
University of Minnesota
Department of Psychology
Elliott Hall
75 E. River Road
Minneapolis, MN 55455

Dr. Milton S. Katz
European Science Coordination
Office
U.S. Army Research Institute
Box 65
FPO New York 09510-1500

Dr. Frank Keil
Department of Psychology
228 Uris Hall
Cornell University
Ithaca, NY 14850

Dr. Wendy Kellogg
IBM T. J. Watson Research Ctr.
P.O. Box 704
Yorktown Heights, NY 10598

Dr. Dennis Kibler
University of California
Department of Information
and Computer Science
Irvine, CA 92717

Dr. David Kieras
Technical Communication Program
TIDAL Bldg., 2360 Bonisteel Blvd.
University of Michigan
Ann Arbor, MI 48109-2108

Dr. J. Peter Kincaid
Army Research Institute
Orlando Field Unit
c/o PM TRADE-E
Orlando, FL 32813

Dr. Walter Kintsch
Department of Psychology
University of Colorado
Boulder, CO 80309-0345

Dr. David Klahr
Carnegie-Mellon University
Department of Psychology
Schenley Park
Pittsburgh, PA 15213

Dr. Janet L. Kolodner
Georgia Institute of Technology
School of Information
& Computer Science
Atlanta, GA 30332

Distribution List [Illinois/Gentner] NR 667-551

Dr. Kenneth Kotovsky
Community College of
Allegheny County
808 Ridge Avenue
Pittsburgh, PA 15212

Dr. David H. Krantz
Department of Psychology
Columbia University
406 Schermerhorn Hall
New York, NY 10027

Dr. Benjamin Kuipers
University of Texas at Austin
Department of Computer Sciences
Taylor Hall 2.124
Austin, Texas 78712

Dr. David R. Lambert
Naval Ocean Systems Center
Code 772
271 Catalina Boulevard
San Diego, CA 92152-5000

Dr. Pat Langley
University of California
Department of Information
and Computer Science
Irvine, CA 92717

Dr. Marcy Lansman
University of North Carolina
The L. L. Thurstone Lab.
Davis Hall CB #3270
Chapel Hill, NC 27514

Dr. Jill Larkin
Carnegie-Mellon University
Department of Psychology
Pittsburgh, PA 15213

Dr. Jean Lave
Institute for Research
on Learning
3333 Coyote Hill Road
Palo Alto, CA 92304

Dr. Robert W. Lawler
Matthews 118
Purdue University
West Lafayette, IN 47907

Dr. Alan M. Lesgold
Learning R&D Center
University of Pittsburgh
Pittsburgh, PA 15260

Dr. Jim Levin
Department of
Educational Psychology
210 Education Building
1310 South Sixth Street
Champaign, IL 61820-6990

Dr. John Levine
Learning R&D Center
University of Pittsburgh
Pittsburgh, PA 15260

Dr. Michael Levine
Educational Psychology
210 Education Bldg.
University of Illinois
Champaign, IL 61801

Dr. Clayton Lewis
University of Colorado
Department of Computer Science
Campus Box 430
Boulder, CO 80309

Matt Lewis
Department of Psychology
Carnegie-Mellon University
Pittsburgh, PA 15213

Library
Naval Training Systems Center
Orlando, FL 32813

Library
Naval War College
Newport, RI 02940

Science and Technology Division
Library of Congress
Washington, DC 20540

Dr. Jane Malin
Mail Code EF5
NASA Johnson Space Center
Houston, TX 77058

Dr. William L. Maloy
Code 04
NETPMSA
Pensacola, FL 32509-5000

Dr. Elaine Marsh
Naval Center for Applied Research
in Artificial Intelligence
Naval Research Laboratory
Code 5510
Washington, DC 20375-5000

Dr. Sandra P. Marshall
Dept. of Psychology
San Diego State University
San Diego, CA 92182

Dr. Manton M. Matthews
Department of Computer Science
University of South Carolina
Columbia, SC 29208

Dr. Richard E. Mayer
Department of Psychology
University of California
Santa Barbara, CA 93106

Dr. Joseph C. McLachlan
Code 52
Navy Personnel R&D Center
San Diego, CA 92152-6800

Dr. James McMichael
Technical Director
Navy Personnel R&D Center
San Diego, CA 92152-6800

Dr. Barbara Means
SRI International
333 Ravenswood Avenue
Menlo Park, CA 94025

Dr. Douglas L. Medin
Department of Psychology
University of Illinois
603 E. Daniel Street
Champaign, IL 61820

Dr. George A. Miller
Dept. of Psychology
Green Hall
Princeton University
Princeton, NJ 08540

Distribution List [Illinois/Gentner] NR 667-551

Dr. William Montague
NPRDC Code 13
San Diego, CA 92152-6800

Director, Manpower and Personnel
Laboratory,
NPRDC (Code 06)
San Diego, CA 92152-6800

Office of Naval Research,
Code 1142CS
800 N. Quincy Street
Arlington, VA 22217-5000
(6 Copies)

Dr. Randy Mumaw
Training Research Division
HumRRO
1100 S. Washington
Alexandria, VA 22314

Director, Human Factors
& Organisational Systems Lab,
NPRDC (Code 07)
San Diego, CA 92152-6800

Office of Naval Research,
Code 1142PS
800 N. Quincy Street
Arlington, VA 22217-5000

Dr. Allen Mauro
Behavioral Technology
Laboratories - USC
1845 S. Elena Ave., 4th Floor
Redondo Beach, CA 90277

Library, NPRDC
Code P201L
San Diego, CA 92152-6800

Psychologist
Office of Naval Research
Branch Office, London
Box 39
FPO New York, NY 09510

Chair, Department of
Computer Science
U.S. Naval Academy
Annapolis, MD 21402

Technical Director
Navy Personnel R&D Center
San Diego, CA 92152-6800

Special Assistant for Marine
Corps Matters,
ONR Code 00MC
800 N. Quincy St.
Arlington, VA 22217-5000

Dr. Allen Newell
Department of Psychology
Carnegie-Mellon University
Schenley Park
Pittsburgh, PA 15213

Commanding Officer,
Naval Research Laboratory
Code 2627
Washington, DC 20390

Dr. Judith Orasanu
Basic Research Office
Army Research Institute
5001 Eisenhower Avenue
Alexandria, VA 22333

Dr. Richard E. Nisbett
University of Michigan
Institute for Social Research
Room 5281
Ann Arbor, MI 48109

Dr. Harold F. O'Neil, Jr.
School of Education - WPH 801
Department of Educational
Psychology & Technology
University of Southern California
Los Angeles, CA 90089-0031

Dr. James Paulson
Department of Psychology
Portland State University
P.O. Box 751
Portland, OR 97207

Dr. A. F. Norcio
Code 5530
Naval Research Laboratory
Washington, DC 20375-5000

Office of Naval Research
Code 1133
800 North Quincy Street
Arlington, VA 22217-5000

Military Assistant for Training and
Personnel Technology,
OUSD (R & E)
Room 3D129, The Pentagon
Washington, DC 20301-3080

Dr. Donald A. Norman
C-015
Institute for Cognitive Science
University of California
La Jolla, CA 92093

Office of Naval Research,
Code 1142
800 N. Quincy St.
Arlington, VA 22217-5000

Dr. David N. Perkins
Project Zero
Harvard Graduate School
of Education
7 Appian Way
Cambridge, MA 02138

Deputy Technical Director
NPRDC Code 01A
San Diego, CA 92152-6800

Office of Naval Research,
Code 1142BI
800 N. Quincy Street
Arlington, VA 22217-5000

Dr. Nancy N. Perry
Naval Education and Training
Program Support Activity
Code-047
Building 2435
Pensacola, FL 32509-5000

Director, Training Laboratory,
NPRDC (Code 05)
San Diego, CA 92152-6800

Distribution List [Illinois/Gentner] NR 667-551

Department of Computer Science,
Naval Postgraduate School
Monterey, CA 93940

Dr. Steven Pinker
Department of Psychology
E10-018
MIT
Cambridge, MA 02139

Dr. Tjeerd Plomp
Twente University of Technology
Department of Education
P.O. Box 217
7500 AE ENSCHEDE
THE NETHERLANDS

Dr. Steven E. Poltrock
MCC
3500 West Balcones Center Dr.
Austin, TX 78759-6509

Dr. Harry E. Pople
University of Pittsburgh
Decision Systems Laboratory
1360 Scaife Hall
Pittsburgh, PA 15261

Dr. Mary C. Potter
Department of Brain and
Cognitive Sciences
MIT (E-10-039)
Cambridge, MA 02139

Dr. Joseph Psotka
ATTN: PERI-IC
Army Research Institute
5001 Eisenhower Ave.
Alexandria, VA 22333-5600

Dr. Lynne Reder
Department of Psychology
Carnegie-Mellon University
Schenley Park
Pittsburgh, PA 15213

Dr. Steve Reder
Northwest Regional
Educational Laboratory
400 Lindsay Bldg.
710 S.W. Second Ave.
Portland, OR 97204

Dr. James A. Reggia
University of Maryland
School of Medicine
Department of Neurology
22 South Greene Street
Baltimore, MD 21201

Dr. J. Wesley Regian
AFHRL/IDI
Brooks AFB, TX 78235

Dr. Fred Reif
Physics Department
University of California
Berkeley, CA 94720

Dr. Lauren Resnick
Learning R & D Center
University of Pittsburgh
3939 O'Hara Street
Pittsburgh, PA 15213

Dr. Gilbert Ricard
Mail Stop K02-14
Grumman Aircraft Systems
Bethpage, NY 11787

Dr. Linda G. Roberts
Science, Education, and
Transportation Program
Office of Technology Assessment
Congress of the United States
Washington, DC 20510

Dr. William B. Rouse
Search Technology, Inc.
4725 Peachtree Corners Circle
Suite 200
Norcross, GA 30092

Dr. Roger Schank
Yale University
Computer Science Department
P.O. Box 2158
New Haven, CT 06520

Dr. Alan H. Schoenfeld
University of California
Department of Education
Berkeley, CA 94720

Dr. Janet W. Schofield
816 LRDC Building
University of Pittsburgh
3939 O'Hara Street
Pittsburgh, PA 15260

Dr. Judith W. Segal
OERI
555 New Jersey Ave., NW
Washington, DC 20208

Dr. Colleen M. Seifert
Institute for Cognitive Science
Mail Code C-015
University of California, San Diego
La Jolla, CA 92093

Dr. Ben Shneiderman
Dept. of Computer Science
University of Maryland
College Park, MD 20742

Dr. Lee S. Shulman
School of Education
507 Ceras
Stanford University
Stanford, CA 94305-3084

Dr. Robert S. Siegler
Carnegie-Mellon University
Department of Psychology
Schenley Park
Pittsburgh, PA 15213

Dr. Derek Sleeman
Computing Science Department
King's College
Old Aberdeen AB9 2UB
Scotland
UNITED KINGDOM

Dr. Richard E. Snow
School of Education
Stanford University
Stanford, CA 94305

Dr. Elliot Soloway
Yale University
Computer Science Department
P.O. Box 2158
New Haven, CT 06520

Distribution List [Illinois/Gentner] NR 667-551

Dr. Richard C. Sorensen
Navy Personnel R&D Center
San Diego, CA 92152-6800

Headquarters, U. S. Marine Corps
Code MPI-20
Washington, DC 20380

Dr. Wallace Wulfeck, III
Navy Personnel R&D Center
Code 51
San Diego, CA 92152-6800

Dr. Kathryn T. Spoehr
Brown University
Department of Psychology
Providence, RI 02912

Dr. Kurt Van Lehn
Department of Psychology
Carnegie-Mellon University
Schenley Park
Pittsburgh, PA 15213

Dr. Masoud Yasdani
Dept. of Computer Science
University of Exeter
Prince of Wales Road
Exeter EX44PT
ENGLAND

Dr. Robert J. Sternberg
Department of Psychology
Yale University
Box 11A, Yale Station
New Haven, CT 06520

Dr. Jerry Vogt
Navy Personnel R&D Center
Code 51
San Diego, CA 92152-6800

Mr. Carl York
System Development Foundation
1 Maritime Plaza, #1770
San Francisco, CA 94111

Dr. Thomas Sticht
Applied Behavioral and
Cognitive Sciences, Inc.
P.O. Box 6640
San Diego, CA 92106

Dr. Beth Warren
BBN Laboratories, Inc.
10 Moulton Street
Cambridge, MA 02238

Dr. Joseph L. Young
National Science Foundation
Room 320
1800 G Street, N.W.
Washington, DC 20550

Dr. John Tangney
AFOSR/NL, Bldg. 410
Bolling AFB, DC 20332-6448

Dr. Keith T. Wescourt
FMC Corporation
Central Engineering Labs
1205 Coleman Ave., Box 580
Santa Clara, CA 95052

Dr. Kikumi Tatsuoka
CERL
252 Engineering Research
Laboratory
103 S. Mathews Avenue
Urbana, IL 61801

Dr. Douglas Wetzel
Code 51
Navy Personnel R&D Center
San Diego, CA 92152-6800

Dr. Perry W. Thorndyke
FMC Corporation
Central Engineering Labs
1205 Coleman Avenue, Box 580
Santa Clara, CA 95052

Dr. Barbara White
BBN Laboratories
10 Moulton Street
Cambridge, MA 02238

Dr. Martin A. Tolcott
3001 Veasey Terr., N.W.
Apt. 1617
Washington, DC 20008

Dr. Robert A. Wisher
U.S. Army Institute for the
Behavioral and Social Sciences
5001 Eisenhower Avenue
Alexandria, VA 22333-5600

Dr. Douglas Towne
Behavioral Technology Labs
University of Southern California
1845 S. Elena Ave.
Redondo Beach, CA 90277

Dr. Martin F. Wiskoff
Defense Manpower Data Center
550 Camino El Estero
Suite 200
Monterey, CA 93943-3231

Chair, Department of
Computer Science
Towson State University
Towson, MD 21204

Mr. John H. Wolfe
Navy Personnel R&D Center
San Diego, CA 92152-6800